

Distributor Price List Effective: January 1, 2021

CHALLENGER ST II BODY

	PAGE
Challenger ST II Body: CST82", CST98", CST110", and CST134"	5-6
Nomenclature	3
No Wheel Box - Application Information	3
Chassis Pool Installation Instructions	4

CHALLENGER ST II BODY OPTIONS

OHALLENGER OF HEADT OF HORE	
	PAGE
Accessories	7
Folding Steps	7
Grab Handles	7
Cover Plate Kits	7
Adapter Plugs	7
Back Up Alarms	8
Backup Camera Mounting Bracket Kit	8
Backup Camera Kit	8
Bar Locks (Push/Pull Design) Rear Handle	8
Brake Controller	8
Bumpers	9
Bumper Option (Bolt-On)	9
Bumper Ends (Liftgate Prep Kits)	9
Compartment Strip Lights - LED	10
Crane Reinforcement (Built-in Option)	11
Crane Reinforcement Supplemental Mounting Kit	12
11	
Deck Slide (Bolt-on)	12
Drawer Packages - Modular Design (Bolt-on) - Vertical	13
Drawer Packages - Modular Design (Bolt-on) - Horizontal	14
Drawer Dividers	14
Fender Kit with Scoop (CST82" Only Application)	15
Fender Panel Assembly with Scoop	15
Fuel Fill (Aluminum Sugar Scoop)	16
Fuel Fill "DEF" Bracket Kit (Bolt-On)	16
Punched Headache Racks (Bolt-On)	16
Highroof	17
Under 10,001 GVW Chassis / Highroof Application Guideline (Longbeds)	18
Highroof Options	19 - 21
Delete Rear Doors, Bulkhead without window, ILO Std. Bulkhead with window,	19
Conduit Doors, Load-space Dome lights,	19
Screens, Rear Door No Window	20
Lift-up Side Access Doors, & Side Windows	21
Hitches (Bolt-On)	22 - 23
Hooks (Bolt-on)	24
Installation (Body)	24
Installation (Chassis Modification)	24
Ladder Rack - Overhead (Bolt-on - FlexStrut Channel Construction)	25
Ladder Rack - Overcab (Bolt-on - FlexStrut Channel Construction)	25
Ladder Rack - Overhead Options (FlexSmart Channel LDR)	26
Awning 8' with Manual Crank (FlexSmart Channel LDR)	26
Pipe / Conduit Tube Holder Assembly (FlexSmart Channel LDR)	26
Outside Work Light Assembly with harness (FlexSmart Channel LDR)	26

Notes: Call STAHL PARTS DEPT for Replacement Parts Pricing.



Distributor Price List Effective: January 1, 2021


CHALLENGER ST II BODY OPTIONS - Continued

	PAGE
Ladder Rack - Side Mount (Body) - Compartment Top (Bolt-on)	26
Ladder Rack - Highroof (Bolt-on)	26
Side Mount Type (Bolt-on)	26
Top Mount Type (Bolt-on)	26
Ladder Rack - Overcab for Body (Bolt-on)	27
Light Kit - LED Surface Mount	28
Light Kit - Strobe - LED Surface Mount	28
Liner (Spray-On) Textured	29
Liner (Spray-On) UL1000	30
Louvers	30
Low Sliding Roof (Bolt-on)	31
Mounting Kits - Supplemental Body Mounting Kit	32
Mounting Kits - Supplemental Fuel Fill Kit	32
Off-Road Mounting Kits - Spring Mount	32
Paint (Wet) / Powder Coat / In Prime	33-34
Paint (Wet) (Body & Options)	33
Powder Coat (Universal White) is Standard unless noted otherwise	34
In Prime (White) ILO Powder Coat (Body & Options)	34
Pipe Carrier / Pipe Support / Pipe Vise Bracket (Bolt-on)	35
Power Door Locks	35
Stone Guards (Aluminum Treadbrite)	35
Tailboard Asm (Bolt-On)	36
Tailgate (Slam-Action) - Delete	36
Tailgate (Slam-Action) - Delete & Omit Tailgate Holes from Rear End Panel	36
Tank Compartments - 60" High (Built into Body Design)	37
Tank Holders (Bolt-on)	37
Tie Down Ring (Single) Kit (Load-space)	38
Tie Down Ring Floor Kit - Set of (4) Four (In Floor)	38
Tie Down Ring Floor Kit - Set of (6) Six (In Floor)	39
Tire Carriers (Bolt-on)	40
Top Paks (Add-on) (Bolt-on)	40
Top Pak Dividers	40
Trays (With Dividers) (Bolt-on)	41-42
Trays (With Dividers) (Bolt-on) - Delete	42
Tray Dividers	42
West Coast CST ST II (Aluminum) Upgrade Package	43
West Coast - Aluminum Treadbrite (Diamond Plate) Overlay Kits	43

Notes: Call STAHL PARTS DEPT for Replacement Parts Pricing.

Distributor Price List Effective: January 1, 2021

NOMENCLATURE

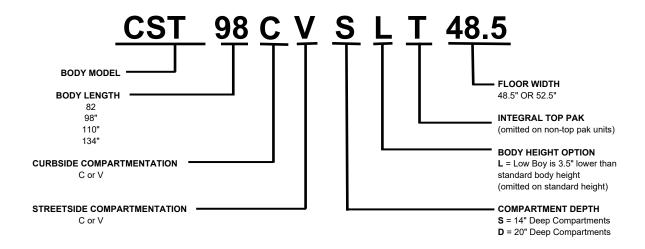

NO WHEEL BOX - Application Information

In order to maximize the cargo carrying capacity, all Challenger ST II (CST) bodies will be available with or without wheel-boxes in the load-space. Part numbers will remain as listed in the price book, except as follows:

- •Units with wheel-boxes will use the base 6-digit part number in the price book (Unless No Wheel-boxes are standard)
- •Units without wheel-boxes will use the base 6-digit part number with a "-NWB" extension.
 - •Example: 205916-NWB. (CST110VVD-52.5 "Without Wheel-boxes")

Note: Stahl recommends wheel boxes for all Dual Rear Wheel (DRW) applications based on OEM-specified clearances for wheel jounce to prevent damage from the tires rubbing the body. Stahl will **NOT** warranty damage to the vehicle or body due to wheel jounce for DRW bodies without wheel boxes.

Applications are as follows:

- •Standard GM3500 56CA DRW chassis: 8' bodies (Models CST98) with 52.5" floors:
- Wheel-boxes ARE required; use the standard body part numbers.
- •Standard Ford F350 56CA DRW chassis: 8' bodies (Models CST98) with 52.5" floors:
- Wheel-boxes ARE required; use the standard body part numbers.
- •Standard RAM 3500 56CA DRW chassis: 8' bodies (Models CST98) with 52.5" floors:
- Wheel-boxes ARE required; use the standard body part numbers.
- •<u>Standard GM3500 60CA & 84CA DRW (Narrow Track) chassis</u>: 9' & 11' bodies (Models CST110 & CST134) with 48.5" floors: Wheel-boxes **ARE** required; use the standard body part numbers.
- •<u>Standard GM3500 60CA & 84CA DRW (Wide Track) chassis</u>: 9' & 11' bodies (Models CST110 & CST134) with 52.5" floors: Wheel-boxes **ARE** required; use the standard body part numbers.
- •<u>Standard Ford F350 60CA and 84CA DRW chassis</u>: 9' and 11' bodies (Models CST110 and CST134) with 52.5" floors: Wheel-boxes **ARE** required; use the body part numbers.
- •<u>Standard Ford F450-F550 60CA and 84CA DRW chassis</u>: 9' and 11' bodies (Models CST110 and CST134) with 52.5" floors: Wheel-boxes **ARE** required; use the body part numbers.
- •<u>Standard GM4500/5500 60CA and 84CA DRW chassis</u>: 9' and 11' bodies (Models CST110 and CST134) with 52.5" floors. Wheel-boxes **ARE** required; use the standard body part numbers.
- •<u>Standard RAM 4500/5500 60CA and 84CA DRW chassis</u>: 9' and 11' bodies (Models CST110 and CST134) with 52.5" floors: Wheel-boxes **ARE** required; use the standard body part numbers.

Notes:

1. If you have any questions about With or Without Wheel Boxes, then please contact your Sales Representative, and provide specific chassis information. Sales will then review your questions with our Engineering Department.



Distributor Price List Effective: January 1, 2021

INSTRUCTIONS FOR STAHL MOUNTED BODIES

Please use the following guidelines when ordering a Challenger ST II body to be installed and painted at a STAHL manufacturing facility.

The following individual items must be ordered:

- 1 Challenger ST II service body.
- 2 Bumper.
- 3 Light kit LED Surface Mounted, installed on to body.
- 4 Add/Delete Streetside Fender Panel Assembly with Scoop (to provide required Sugar Scoop)

 To address Gas and/or Diesel (or Urea) fuel fill requirements (as needed)
- 5 Adaptor Plug installed

1 Challenger ST II body

- 6 Finish Paint (Powder Coat Universal White is built into the Body & Options)
- 7 Installation (Body) & (Chassis modification if needed)
- 8 Any additional options must be ordered with the *installed* price.

EXAMPLE

- Distributor supplies a 56" cab-to-axle single rear wheel Ford chassis.
- STAHL Distributor would order the following items at the following pricing:

•	Offairefiger C	i ii body	
	205393	CST98VVS-48.5	\$4,813
2	Bumper.		
	230165	Recessed Galvanneal/Circle Punched Tread Bumper	\$312
3	Light kit - LE	D Surface Mounted, installed on to body.	
	230523	Under 80" LED [Surface Mounted] Light Kit - installed on to body.	\$340
4a	Delete Street	side Fender Panel Assembly	
	186140-04	Delete Streetside Fender Panel Asm (No Fuel Fill Cutout)	\$0
4b	Add Streetsi	de Fender Panel Assembly with Front Fuel Sugar Scoop	
	186140-01	Add Streetside Fender Panel Asm (W/Front Fuel Sugar Scoop)	\$104
5	Adaptor Plug	J	
	153738	Adapter plug - 2011-Current Ford 40", 56" pick-up box delete	\$36
6	Finish Paint		
	200478	Powder Coat (Universal White) - Built into the Body & Options	\$0
7	Installation (Body) - CST98	
	Drop	Install body (onto drop chassis)	\$623
8	Any addition	al options must be ordered with the <i>installed</i> price.	
	No additional	options requested.	
	Total Bo	dy Price Installed & Painted (Powder Coated - Universal White)	\$6,228
	Dealer wants	to add a Low Sliding Roof.	
	STAHL Distrib	outor would order the following items in addition to the above:	
	232798	Low Sliding Roof - installed	\$1,803
	200478	Powder Coat (Universal White) - Built into the LSR Option	\$0
	Total Bo	dy Price Installed and Painted (Powder Coated) with Added Option	\$8,031
	Total Bo	dy Price Installed and Painted (Powder Coated) with Added Option	\$8,



Distributor Price List Effective: January 1, 2021

82" CHALLENGER ST II BODIES (POWDER COATED - WHITE)

PART		FLOOR	BODY	COMPT.	BODY	BODY	APPROX.	CAB-TO-	REAR	PRICE
NUMBER	MODEL	WIDTH	LENGTH	DEPTH	WIDTH	HEIGHT	WEIGHT	AXLE	WHEEL	EACH
206063	CST82VVS	48.5"	82"	14"	78.5"	39.5"	910#	*TBD	Single	\$4,994
217955	CST82VVST	48.5"	82"	14"	78.5"	42"	965#	*TBD	Single	\$6,016
205896	CST82VVSLT	48.5"	82"	14"	78.5"	38.5"	965#	*TBD	Single	\$6,016

- •CST82" RAM body (37" CA) will fit 2006-Current full-size Pick-ups w/bed removed (check box removal program).
- •CST82" Ford body (40" CA) will fit 1999-Current full-size Ford Super Cab or Crew Cab w/bed removed (check box removal program).
- •CST82" Chevy body (42" CA) will fit 2002-Current full-size GM Extend Cab or Crew Cab w/bed removed (check box removal program).
- -All CST82" Bodies require CST82" Fender Kit (RAM = 37"CA, Ford = 40"CA, or GM = 42"CA) w/fuel fill to complete body assembly...
 - •Fender Kits include: SS Fender panel with Fuel Cutout, CS Fender panel, Aluminum fuel fill, & Frame Extension (as needed)...
- •Fender Kit must be ordered with the Body at the same time...
- •CST82 bodies are supplied with 6-point mounting as standard to meet current RAM & Chevy chassis mounting requirements...
 - •Note: RAM (37" CA) & Chevy (42" CA) applications are installed with 6-point mounting as standard to meet current mounting...
 - •Note: Ford (40" CA) applications are installed with 4-point mounting as standard...
- •Note: The above short CA bodies have different specifications that include the following:
 - •Shelving: Streetside & Curbside Front Vertical: (1) Tray with dividers
 - •Shelving: Streetside Horizontal: Open, and Curbside Horizontal: (1) Tray with dividers (Same as standard)...
 - •Shelving: Streetside & Curbside Rear Vertical: (2) Trays with dividers
 - •Note: Front Verticals Only are no longer supplied with the standard spring-loaded door holders (ILO standard one per side)...

98" CHALLENGER ST II BODIES (POWDER COATED - WHITE)

-	•, . <u> </u>			(,		
	PART		FLOOR	BODY	COMPT.	BODY	BODY	APPROX.	CAB-TO-	REAR	PRICE
	NUMBER	MODEL	WIDTH	LENGTH	DEPTH	WIDTH	HEIGHT	WEIGHT	AXLE	WHEEL	EACH
	205393	CST98VVS	48.5"	98"	14"	78.5"	39.5"	990#	55", 56"	Single	\$4,813
	205816	CST98VVSL	48.5"	98"	14"	78.5"	36"	975#	55", 56"	Single	\$4,813
	205867	CST98VVST	48.5"	98"	14"	78.5"	42"	1,065#	55", 56"	Single	\$6,244
	205751	CST98VVSLT	48.5"	98"	14"	78.5"	38.5"	1,050#	55", 56"	Single	\$6,244
	206525	CST98CCS	48.5"	98"	14"	78.5"	42"	1,065#	55", 56"	Single	\$5,051
	206322	CST98CVS	48.5"	98"	14"	78.5"	42"	990#	55", 56"	Single	\$5,051
	217049	CST98VCS	48.5"	98"	14"	78.5"	42"	990#	55", 56"	Single	\$5,051
	205783	CST98VVD	52.5"	98"	20"	96"	39.5"	1,145#	55", 56"	Dual	\$5,130
	205783-NWB	CST98VVD-NWB	52.5"	98"	20"	96"	39.5"	1,145#	55", 56"	Dual	\$5,130
	206528	CST98VVDT	52.5"	98"	20"	96"	42"	1,235#	55", 56"	Dual	\$7,583
	206528-NWB	CST98VVDT-NWB	52.5"	98"	20"	96"	42"	1,235#	55", 56"	Dual	\$7,583

[•]Please contact Inside Sales for chassis/body applications for 1998 and older chassis.

[•]Off-road mounting kits are required for bodies to be used on uneven or unpaved terrain or with aerial devices without outriggers

[•]CST98 bodies are supplied with 6-point mounting as standard to meet current RAM & Chevy chassis mounting requirements...

[•]Note: Ford chassis applications are installed with 4-point mounting as standard...

[•]Above Bodies include Powder Coat (Universal White) within pricing...

[•]Powder Coat #200478 (Universal White) is standard for the Challenger ST II Bodies & Options, unless an option notes otherwise...

^{*}Specify on All Orders (Bodies, as well as Options) if they are to be Powder Coat, Finish Paint (Wet), or In Prime to avoid any confusion...

[•]Note: See Hitch Options for Factory Hitch mounting brackets to allow OEM Factory Hitch to work with Standard Body & Bumper. This option should be ordered at the same time as your body...

[•]Reference "No wheel box application instructions" for "NWB" information..

[•]Bodies with the "NWB" Extension (No Wheel-boxes) are priced the same as those bodies with wheel boxes (Challenger ST II only).

[•]Note: See STAHL's Challenger ST II Body Specification Sheet / Literature for additional Information.



Distributor Price List Effective: January 1, 2021

110" CHALLENGER ST II BODIES (POWDER COATED - WHITE)

PART		FLOOR	BODY	COMPT.	BODY	BODY	APPROX.	CAB-TO-	REAR	PRICE EACH
NUMBER	MODEL	WIDTH	LENGTH	DEPTH	WIDTH	HEIGHT	WEIGHT	AXLE	WHEEL	PRIOL LACIT
205678	CST110VVS	48.5"	110"	14"	78.5"	39.5"	1,110#	60"	Single	\$5,347
206155	CST110VVST	48.5"	110"	14"	78.5"	42"	1,195#	60"	Single	\$7,219
205908	CST110VVD	48.5"	110"	20"	90.5"	39.5"	1,245#	60"	Dual	\$5,585
205916	CST110VVD	52.5"	110"	20"	96"	39.5"	1,280#	60"	Dual	\$5,641
206544	CST110VVDT	52.5"	110"	20"	96"	42"	1,375#	60"	Dual	\$7,583
206544-NWB	CST110VVDT-NWB	52.5"	110"	20"	96"	42"	1,375#	60"	Dual	\$7,583

- •Supplemental Mounting kit is required for 2001-Current GM 60" and 84" cab-to-axle chassis. (see page 32)
- •Supplemental Mounting kit is required for 2006-Current RAM 60" and 84" cab-to-axle chassis. (see page 32)
- *Supplemental Mounting kit is required for 2017-Current Ford 60" and 84" cab-to-axle chassis. (see page 32)
- •Reference "No wheel box application instructions" for "NWB" information...
- •Bodies with the "NWB" Extension (No Wheel-boxes) are priced the same as those bodies with wheel boxes (Challenger ST II only).

134" CHALLENGER ST II BODIES (POWDER COATED - WHITE)

PART		FLOOR	BODY	COMPT.	BODY	BODY	APPROX.	CAB-TO-	REAR	PRICE EACH
NUMBER	MODEL	WIDTH	LENGTH	DEPTH	WIDTH	HEIGHT	WEIGHT	AXLE	WHEEL	PRICE EACH
205925	CST134VVD	48.5"	134'	20"	90.5"	39.5"	1,425#	84'	Dual	\$6,935
206161	CST134VVD	52.5"	134"	20"	96"	39.5"	1,465#	84"	Dual	\$7,083
206161-NWB	CST134VVD-NWB	52.5"	134"	20"	96"	39.5"	1,465#	84"	Dual	\$7,083
206551	CST134VVDT	52.5"	134"	20"	96"	42"	1,530#	84"	Dual	\$8,804

- •Supplemental Mounting kit is required for 2001-Current GM 60" and 84" cab-to-axle chassis. (see page 32)
- •Supplemental Mounting kit is required for 2006-Current RAM 60" and 84" cab-to-axle chassis. (see page 32)
- •Supplemental Mounting kit is required for 2017-Current Ford 60" and 84" cab-to-axle chassis. (see page 32)
- •Please contact Inside Sales for chassis/body applications for 1998 and older chassis.
- •Aerial reinforcements are required for bodies that will be used with an aerial device.
- •Off-road mounting kits are required for bodies to be used on uneven or unpaved terrain or with aerial devices without outriggers
- •Above Bodies include Powder Coat (Universal White) within pricing...
- •Powder Coat #200478 (Universal White) is standard for the Challenger ST II Bodies & Options, unless an option notes otherwise...
- *Specify on All Orders (Bodies, as well as Options) if they are to be Powder Coat, Finish Paint (Wet), or In Prime to avoid any confusion...
- •Reference "No wheel box application instructions" for "NWB" information..
- •Bodies with the "NWB" Extension (No Wheel-boxes) are priced the same as those bodies with wheel boxes (Challenger ST II only).
- •Note: See STAHL's Challenger ST II Body Specification Sheet / Literature for additional Information.



Distributor Price List Effective: January 1, 2021

ACCESSORIES

PART			PRIC	E EACH
NUMBER	DESCRIPTION	APPLICATION	LOOSE	INSTALLED*
200944	Folding step assembly - large w/backer plate & hardware (Bolt-on)	To gain access to top of Highroof	\$88	\$115
228020	Grab handle assembly - Stainless steel (bolt-on). Includes a PAIR of grab handles, and for the installation of grab handles on body end panels, or inside rear High Roof doors.	To gain access to help enter load- space.	\$44	\$80
218947	Cover Plate Kit (Bolt-on), to cover access between horizontal & vertical compt. (1 cover plate per kit)	CST (S) Body - 39.5"H x 14"D	\$29	\$42
231161	Cover Plate Kit (Bolt-on), to cover access between horizontal & vertical compt. (1 cover plate per kit)	CST (SL) Body - 36"H x 14"D	\$29	\$42
216063	Cover Plate Kit (Bolt-on), to cover access between horizontal & vertical compt. (1 cover plate per kit)	CST (ST) Body (Top Pak) - 42"H x 14"D	\$29	\$42
208819	Cover Plate Kit (Bolt-on), to cover access between horizontal & vertical compt. (1 cover plate per kit)	CST (D) Body - 39.5"H x 20"D	\$29	\$42
210239	Cover Plate Kit (Bolt-on), to cover access between horizontal & vertical compt. (1 cover plate per kit)	CST (DT) Body (Top Pak) - 42"H x 20"D	\$29	\$42
231162	Cover Plate Kit (Bolt-on), to cover access between horizontal & vertical compt. (1 cover plate per kit)	CST (DL) Body - 36"H x 20"D	\$29	\$42

[•]Note: At time of printing "SPL" = Engineering Required, so lead times would be longer than standard product.

ADAPTER PLUGS

PART			E EACH	
NUMBER	DESCRIPTION	LOOSE	INSTALLED	
153739	Adapter plug (Generic CST Splice) - 2003-2018 RAM 37", 56" CA	\$36	n/a	
238867	Adapter plug - 2019-Current RAM 37", 56" CA with non-LED factory chassis lighting	\$54	n/a	
238922	Adapter plug kit - 2019-Current RAM 37", 56" CA with LED factory chassis lighting	\$85	n/a	
139702	Adapter plug - 2000-Current RAM 60", and 84" cab-to-axle	\$36	n/a	
153738	Adapter plug - 2000-Current Ford 60" and 84" cab-to-axle, or 2011-Current Ford 40" CA and 56" CA Pick-up Box Delete*, or 2017-Current Ford 40" CA and 56" CA Pick-up Box Removal** w/Stahl Backup Camera Kit (Note that chassis BMC must be recalibrated at Ford dealer as needed) Recalibration cost not included.	\$36	n/a	
189854	Adapter plug - 2008-2010 Ford 40" and 56" Pick-up Box Removal	\$36	n/a	
204791	Adapter plug - 2011-2016 Ford 40" and 56" Pick-up Box Removal	\$36	n/a	
228917	Adapter plug - 2017-2019 Ford 40" and 56" Pick-up Box Removal** applications without a Stahl Backup Camera Kit (Note that chassis BMC must be recalibrated at Ford dealer as needed) Recalibration cost not included.	\$36	n/a	
235876	Adapter plug - 2020-Current Ford 40" and 56" Pick-up Box Removal** applications without a Stahl Backup Camera Kit (Note that chassis BMC must be recalibrated at Ford dealer as needed) Recalibration cost not included.	\$54	n/a	
150803	Adapter plug - 2003-2006 GM 42", 56", 60" and 84" cab-to-axle (This is for a 3-light Chassis converted to a 2-light system for body or bumper)	\$85	n/a	
153737	Adapter plug - 2007-2014 GM 42", 56", 60" and 84" cab-to-axle (Noting that Chassis BMC to be recalibrated at GM dealer, as needed). Recalibration is not included	\$36	n/a	
219755	Adapter plug - 2015 GM 42", 56", 60" and 84" cab-to-axle (Noting that Chassis BMC to be recalibrated at GM dealer, as needed for Pick-up Box Removal). Recalibration is not included	\$54	n/a	
225425	Adapter plug - 2016-2019 GM 42", 56", 60" and 84" cab-to-axle (Noting that Chassis BMC to be recalibrated at GM dealer, as needed for Pick-up Box Removal). Recalibration is not included	\$36	n/a	
172537	Adapter plug - 2005-2009 GM (4500 & 5500 Only) Any cab-to-axle	\$36	n/a	
233427	Adapter plug - 2019 GM 4500/5500 . Any cab-to-axle.	\$36	n/a	
234924	Adapter plug - 2020-Current Chevy/GM 2500 and 3500 Pickup Box Delete, Pickup Box Removal	\$36	n/a	
238869	Adapter plug - 2020-Current Chevy/GM, 60" and 84" chassis cab	\$36	n/a	

Adapters must be used for all applications as light kits have wiring harnesses with STAHL plugs as standardd.
 Pick-Up Box Delete is defined as - Pick-up bed deleted at OEM chassis plant

^{*}Must specify installation location at time of order.

^{**} Pick-up Box Removal is defined as - pick-up bed removed by upfitter/installer



Distributor Price List Effective: January 1, 2021

BACK UP ALARMS

PART			PRICE	EACH
NUMBER	DESCRIPTION	APPLICATION	LOOSE	INSTALLED
123477	Back up alarm	All Challenger ST II bodies	\$45	\$121
189842	Back up alarm	All bodies (2008 - To Current Chevy/GM Only)	\$95	\$169

[•]Chevy/GM application require a Special Back up alarm due to circuit requirements.

BACKUP CAMERA MOUNTING BRACKET KIT

PART			PRICI	EEACH
NUMBER	CHASSIS	DESCRIPTION	LOOSE	INSTALLED
232556	FORD	Backup Camera Mounting Bracket Kit for Ford	\$97	n/a
232567	GM	Backup Camera Mounting Bracket Kit for GM	\$97	n/a
232578	RAM	Backup Camera Mounting Bracket Kit for Ram	\$97	n/a

[•]Backup Camera Mounting Bracket Kit only compatible with current CST tailgate design

BACKUP CAMERA KIT

PART		PRICE EACH		
NUMBER	CHASSIS	APPLICATION	LOOSE	INSTALLED
233202	GM	Backup Camera with Mounting Bracket Kit for GM	\$320	\$698
233203	FORD	Backup Camera with Mounting Bracket Kit for Ford	\$745	\$1,125
234345	FORD	Backup Camera Harness Only with Mounting Bracket Kit for Ford (Must use box removal camera)	\$350	\$730
233204	RAM	Backup Camera with Mounting Bracket Kit for Ram	\$579	\$959

[•]Backup Camera Mounting Bracket Kit only compatible with current CST tailgate design

BAR LOCKS - PUSH/PULL, REAR HANDLE

PART		PRICE EACH	
NUMBER APPLICATION		LOOSE	INSTALLED
201871 CST82, CST98 and CST110 top-pak bodies w/drilling instructions		\$448	\$607
201194	CST82, CST98 and CST110 standard bodies w/drilling instructions	\$346	\$506
203584	3584 CST134 top-pak bodies w/drilling instructions \$52		\$700
201207	01207 CST134 standard bodies w/drilling instructions \$377		\$554

Bar locks are push/pull style with handle at the rear of body. Installation Instructions provided for loose applications...

BRAKE CONTROLLER

PART		PRICE	EACH
NUMBER	DESCRIPTION	LOOSE	INSTALLED
902025	Electric Brake Controller (Kelsey #817141) - installed		\$299

[•]For vehicles with a GVWR under 10,000

[•]If tailgate is to be deleted/removed to accommodate a liftgate, the backup camera kit should be ordered from the liftgate manufacturer

[•]For vehicles with a GVWR under 10,000

[•]Specify on order if bar lock option is to be installed, or shipped loose...

[•]Bar lock options work on both "V" and/or "C" type body sides.

[•]Bar locks do not lock lower rear doors on "C" type body sides.

[•]Bar locks are not compatible with SRW crane reinforcement applications due to crane mounting bolt interference

[•]Note: Top Pak Bodies require the bar lock kits to include gas shocks, ILO the standard spring-loaded door holders.

[•]Gas shocks only apply to vertical compartment applications...

[•]Note: Some standard options are not designed (as standard) to work with Bar Locks, Engineering maybe required.



Distributor Price List Effective: January 1, 2021

BUMPERS

PART					PRICE EACH
NUMBER	MODEL	MATERIAL	WIDTH	WEIGHT	LOOSE
230165	Recessed	Galvanneal / Circle Punched Tread)	78 1/4"	67#	\$312
230174	Recessed	Galvanneal / Circle Punched Tread)	90 1/4"	75#	\$396
230190	Recessed	Galvanneal / Circle Punched Tread)	94 1/4"	81#	\$469

- •All bumpers have marker/clearance light cutouts on the corners.
- •All over 80" wide bumpers have ID light holes punched in the bumper riser.
- •Note: All Bumpers are pre-punched to work with (Surface Mounted) Combo S/T/T Light with Back-up Light.
 - ·Light Kits are NOT included with Bumpers...
- •Note: You must order separately a LED Light Kit (Surface Mounted), and Specify if it is to be loose or installed to Body, or Bumper.
- •Bumper recessed is pre-punched for trailer plug. We supply one black trailer hole plug as standard.
- •Bumper installation is covered with body install.
- •Bumpers are not rated to tow anything without one of the towing options listed in the Hitch section.
- •Bumpers are Powder Coated #200478 (Universal White) as Standard..
 - •Specify on All Orders if they are to be Powder Coat, Finish Paint (Wet), or In Prime to avoid any confusion...
- •Above Bumpers are 12 ga. galvanneal steel & are 10 1/8" deep, (8" deep step / 2 1/8" deep riser) w/45 degree corners.
- •Mounting brackets are not included with a bumper (the mounting brackets are a standard part of the body).

BUMPER ENDS (LIFTGATE PREP KITS)

(Deletes tailgate, adds Bumper Ends and chassis specific mounting brackets)

PART			PRICE	PAIR
NUMBER	DESCRIPTION	BODY APPLICATION	LOOSE	INSTALLED
SPL	Liftgate Prep Kit - CST82-48.5 - RAM	CST82 body mounted on 37"CA RAM	TBD	TBD
233071	Liftgate Prep Kit - CST82/98-48.5 Bodies	Any CST82 or CST98 SRW body not	\$58	\$235
200071	(Incl. 228855-01/-02 Mounting Brackets)	using OEM hitch	ΨΟ	Ψ200
233108	Liftgate Prep Kit - CST82/98-48.5 Bodies - Ford	Any CST82 or CST98 SRW body on a	\$58	\$235
233100	(Incl. 233070-01/-02 Mounting Brackets)	2017-Current Ford using OEM hitch	ΨΟ	Ψ200
233109	Liftgate Prep Kit - CST82/98-48.5 Bodies - OEM Hitch	Any CST82 or CST98 SRW body on	\$58	\$235
255109	(Incl. 233069-01/-02 Mounting Brackets)	a truck using OEM hitch	Ψ	Ψ200
233075	Liftgate Prep Kit - CST98-52.5 Bodies	Any CST98 DRW body	\$58	\$235
233073	(Incl. 228855-01/-02 Mounting Brackets)	not using OEM hitch	φοο	Ψ233
233110	Liftgate Prep Kit - CST98-52.5 Body - Ford	Any CST98 DRW body on a 2017-	\$117	\$317
233110	(Incl. 228855-01/-02 Mounting Brackets)	Current Ford using OEM hitch	Ψ117	φσιτ
233111	Liftgate Prep Kit - CST98-52.5 - OEM Hitch	Any CST98 DRW body on a truck	\$117	\$317
200111	(Incl. 233069-01/-02 Mounting Brackets)	using OEM hitch	Ψ117	ΨΟΤ
233074	Liftgate Prep Kit - CST110-48.5	Any 60" CA SRW chassis-cab	\$58	\$235
255074	(Incl. 228831-01/-02 Mounting Brackets)	Arry 00 CA GITTY Chassis-cab	Ψ	Ψ200
233076 Liftgate Prep Kit - DRW-52.5 All 60" & 84" CA DRW Ford, RAM and		\$117	\$317	
233070	(Incl. 228831-01/-02 Mounting Brackets)	GM wide track chassis-cab	ΨΙΙΙ	φσιτ
233076	Liftgate Prep Kit - DRW-48.5	60" & 84" CA DRW GM narrow track	\$117	\$317
233076	(Incl. 228831-01/-02 Mounting Brackets)	chassis-cab	φ117	φυιτ

[•]All DRW kits include a light box for I.D. light installation.

BUMPER OPTION (BOLT-ON)

ſ	PART		PRICE	EACH
	NUMBER	DESCRIPTION	LOOSE	INSTALLED
ſ	230447	Recessed Bumper Cover Panel Kit (Bolt-On), With Fasteners	\$61	n/a

[•]This option is to allow you to convert a recessed bumper to a straight bumper that is no longer available

[•]All Liftgate Prep Kits delete the body's standard tailgate.

[•]All Liftgate Prep Kits for trucks with OEM hitches provide the correct mounting brackets. Brackets do not have bumper attachments.

[•]Bumper Ends have circle-puched style step surface.

[•]Bumper Ends and I.D. Light Boxes are powder coated (#200478 - Universal White) as standard.

[•]Bumper Ends have marker/clearance light cutouts on the corners.

[•]Bumper Ends bolt-on to body rear end panels.

[·]Bumper cover panel is pre-punched for trailer plug.

[•]Bumper option installation is covered with body install.

[•]Bumper Cover Panel is Powder Coated #200478 (Universal White) as Standard...

[•]Specify on All Orders if they are to be Powder Coat, Finish Paint (Wet), or In Prime to avoid any confusion...

[•]Above Bumper cover panel is 12 ga. galvanneal steel.



Distributor Price List Effective: January 1, 2021

COMPARTMENT STRIP LIGHT KITS - LED

PART			PRICE	PER BODY
NUMBER	DESCRIPTION	APPLICATION	LOOSE*	INSTALLED**
1 93/3/7 1 1 1 3		CST82", CST98, CST110 "VV" Bodies	\$544	\$957
234697	LED compartment strip light kit with door jamb switchs, for a (6) compartment "CC" body side applications	CST82", CST98, CST110 "CC" Bodies	\$544	\$957
SPL LED compartment strip light kit with door jamb switchs, for (6) compartment "CV" or "VC" body side applications		CST82", CST98, CST110 "CV", or "VC" Bodies	\$544	\$957
234722	LED compartment strip light kit with door jamb switchs, for a (8) compartment "VV" body side applications	CST134 "VV" Bodies	\$716	\$1,191
234863	Lighted Rocker Switch Kit able to be used as a cab-mounted master switch for LED strip light kits when OEM upfitter switch is unavailable	All CST Bodies	\$34	\$132

•Note: Strip light kits ordered in conjunction with a Tank Compartment will require Engineering.



Distributor Price List Effective: January 1, 2021

CRANE REINFORCEMENT (Built into Body Design)

PART NUMBER	DESCRIPTION	APPLICATION	REAR VERTICAL LOCATION	PRICE INSTALLED
206990	2000#-4000# compartment reinforcement	CST82VVS-48.5	Curbside	\$1,382
206518	2000#-4000# compartment reinforcement	CST98VVS-48.5	Curbside	\$1,382
207025	2000#-4000# compartment reinforcement	CST98VVSL-48.5	Curbside	\$1,382
SPL	2000#-4000# compartment reinforcement	CST98VCS-48.5	Curbside	\$1,382
206929	2000#-4000# compartment reinforcement	CST98VVD-52.5	Curbside	\$1,382
206897	2000#-4000# compartment reinforcement	CST98VVD-52.5 (NWB)	Curbside	\$1,382
206940	2000#-4000# compartment reinforcement	CST110VVS-48.5	Curbside	\$1,382
206957	2000#-4000# compartment reinforcement	CST110VVD-48.5	Curbside	\$1,382
206650	2000#-4000# compartment reinforcement	CST110VVD-52.5	Curbside	\$1,382
206842	2000#-4000# compartment reinforcement	CST134VVD-52.5	Curbside	\$1,382
206868	2000#-4000# compartment reinforcement	CST134VVD-52.5 (NWB)	Curbside	\$1,382
226540	2000# floor reinforcement	CST98" Body w/48.5" Floor	Curbside	\$265
213088	2000# floor reinforcement	CST98" Body w/52.5" Floor	Curbside	\$265
213259	2000# floor reinforcement	CST110" / 134" Body w/48.5" Floor	Curbside	\$265
226538	2000# floor reinforcement	CST110" / 134" Body w/52.5" Floor	Curbside	\$265
SPL	2000# floor reinforcement	All other CST Bodies	Specify*	\$265
230301	5000# compartment reinforcement	CST110VVD-48.5	Curbside	\$2,017
207586	5000# compartment reinforcement	CST110VVD-52.5	Curbside	\$2,017
208275	5000# compartment reinforcement	CST110VVD-52.5 (NWB)	Curbside	\$2,017
211548	5000# compartment reinforcement	CST134VVD-52.5	Curbside	\$2,017
210860	5000# compartment reinforcement	CST134VVD-52.5 (NWB)	Curbside	\$2,017

- •Crane reinforcements are built into the Body, so they are to be ordered with the Body at the same time...
- •See above application notes for crane reinforcements on NWB type bodies...
- •Crane reinforcements are Designed for STAHL Crane Applications ONLY (as standard).
- •Note: Pricing includes the deletion of any applicable trays from the required rear compartment.
- •Note: As standard the adjustable boom support reinforcement is included with your crane reinforcement option, designed for STAHL Adjustable boom support
- •Customer to specify/confirm location at time of order.
- •Due to new surface mount light kits, the Taillight housings are no longer required.
- •A 2000-4000# crane reinforcement will not support heavy duty manual or hydraulic outriggers. A 5000# minimum crane reinforcement is required.
- •Bar locks are not compatible with SRW crane reinforcement applications due to crane mounting bolt interference
- •Standard Bumper will not work with a 5000# crane reinforcement, and must be Special Quoted by Inside Sales.
- •Distributor is responsible for installation when not using STAHL outrigger, bumper, or hitch due to mounting issues.
- •STAHL to provide bumper, and/or hitch mounting instructions for 5000# crane reinforcement applications. (As needed)
- •STAHL Crane Reinforcements are designed for STAHL cranes, so Non-STAHL crane application may require a Special Crane Reinforcements, so please contact Inside Sales for those Non-STAHL crane application for Review & Pricing...
- •Note that some standard options (like Bar Locks) are not designed (as standard) to work with a Crane Reinforcement, so please contact Inside Sales to confirm application and Special Pricing. (As needed)
- •Crane reinforcements as standard are provided with a Solid "Top Plate with No Holes"...
- •Crane reinforcements as standard are designed with the following ratings:
 - •2000# (Floor Only) Crane Reinforcement is rated at: 6,600 Ft. Lb.
 - •2000# 4000# Crane Reinforcement is rated at: 16,000 Ft. Lb.
 - •5000# Crane Reinforcement is rated at: 25,000 Ft. Lb.
- . Note: A Crane Reinforcement / Low Sliding Roof combination is NO LONGER AVAILABLE due to interference between the Crane and Low Sliding Roof.
- •Note: See "Crane Reinforcement Supplemental Mounting Kit Option for any (2017-Current) Ford CST82/98 type application...
- •Note: At time of printing "SPL" = Engineering Required, so lead-time would be longer than standard product.



Distributor Price List Effective: January 1, 2021

CRANE REINFORCEMENT SUPPLEMENTAL MOUNTING KIT

Ī	PA	RT		PRICE	EACH
	NUM	BER	DESCRIPTION / APPLICATION	LOOSE	INSTALLED
Ī	229	502	2017-Current Ford - Crane reinforcement supplemental mounting kit. Application: For CST82/98 Bodies.	\$97	n/a

[•]Required when ordering, building, and/or mounting a CST Body (with Crane Reinforcement) to fit a 2017-Current Ford application (CST82, or CST98).

CRANE MOUNTING HOLES-Top Plate w/Holes (CST II application ONLY)

•See Crane Section

DECK SLIDE (Bolt-on)

PART		PRICE	EACH	
NUMBER	DESCRIPTION	APPLICATION	LOOSE	INSTALLED
203460	Pull-Out Deck Slide for Load-Space (94.31" long x 48" wide)	CST Body (98"Long x 48.5"Wide floor)	\$1,599	\$1,655

[•]Finish Painted (Wet) #134291 DTM (Black) is Standard for this Option and is included within the price.

[•]Note: This kit Add/Delete required rear mounting brackets and fasteners.

[•]Note: The Ford OEM Hitch can not be used with a crane reinforcement application, and they will have to use a STAHL Hitch.

^{•1000} pound maximum weight capacity evenly distributed. Do not exceed the GVWR of the Chassis.

[•]Steel Framing, composite UV resistant non-maintenance deck material, 4.25"H front flange at front of deck slide (above floor line).

[•]Maintenance free enclosed cam bearing slides.

[•]Full length FlexSmart channels on both sides to allow for optional attachments like tie-down rings, strapping, etc...

[•]Latches in three positions (closed, halfway open, and full extension). Provides 66.7" of maximum extension.

[•]Overall Sizes: 96" Long, 6" Height, 48" Width. Overall length fully extended: 161".

[•]Mounting fasteners are included for attaching to Challenger ST II.

[•]See Tie-Down (D-Ring) Pack (FlexSmart) Option for Deck Slide application.



Distributor Price List Effective: January 1, 2021

DRAWER PACKAGES - MODULAR DESIGN (Bolt-on) VERTICAL COMPARTMENT WITH DIVIDERS - MODULAR DESIGN (Bolt-on)

DADT			NO OF BUILDEDO	DDAMED	, ,	FFAOU
PART	DRAWER WIDTH /	COMPARTMENT	NO OF DIVIDERS	DRAWER	PRIC	E EACH
NUMBER	COMPARTMENT WIDTH	DEPTH	PER DRAWER	PACKAGE	LOOSE*	INSTALLED*
213644	14" Width / 21", & 21.41"	14"	4	(4) 3" and (1) 5"	\$1,131	\$1,225
214103	14" Width / 21", & 21.41"	14"	4	(3) 3" and (1) 5"	\$1,056	\$1,145
214312	14" Width / 21"	20"	4	(4) 3" and (1) 5"	\$1,131	\$1,225
214313	14" Width / 21"	20"	4	(3) 3" and (1) 5"	\$1,056	\$1,145
214368	17" Width / 24"	20"	4	(4) 3" and (1) 5"	\$1,131	\$1,225
214369	17" Width / 24"	20"	4	(3) 3" and (1) 5"	\$1,056	\$1,145
214211	22.5" Width / 29.81"	14"	4	(4) 3" and (1) 5"	\$1,131	\$1,225
214217	22.5" Width / 29.81"	14"	4	(3) 3" and (1) 5"	\$1,056	\$1,145
214310	22.5" Width / 29.81"	20"	4	(4) 3" and (1) 5"	\$1,131	\$1,225
214311	22.5" Width / 29.81"	20"	4	(3) 3" and (1) 5"	\$1,056	\$1,145
214163	26" Width / 33.44"	14"	6	(4) 3" and (1) 5"	\$1,131	\$1,225
214162	26" Width / 33.44"	14"	6	(3) 3" and (1) 5"	\$1,056	\$1,145
214308	26" Width / 33.44"	20"	6	(4) 3" and (1) 5"	\$1,131	\$1,225
214309	26" Width / 33.44"	20"	6	(3) 3" and (1) 5"	\$1,056	\$1,145

^{*}Must specify installation location at time of order.

MATERIAL GAUGES

•Drawer Housing 14 gauge high-spangled galvanized steel

- •Drawers 14 gauge high-spangled galvanized steel
- •Lower Support 12 gauge high-spangled galvanized steel
- •Dividers are 16 gauge steel G60 min spangle chem. dry
- •Top Cover Panel 14 gauge high-spangled galvanized steel

SPECIFICATIONS

- •Curbside or Streetside installation.
- •Standard overall drawer depths of 11.56", & 17.56".
- •Standard drawer height of 3" and 5".
- •Package design as Stackable / Modular drawers, & Bolt-In...
- Vertical drawer packages are mounted in the upper portion of the compartment, above the offset.
- •Drawers are arranged from the shortest to tallest, top to bottom.
- Vertical drawer packages 4 high (or more) include / require an upper support bracket kit that ties top drawer to the shelf clips.
- $\bullet (4)3\text{", }(1)5\text{"-Drawer packages will fit }(39.5\text{"H, Non-Top Pak}) \ bodies...$
- •(4)3", (1)5"-Drawer packages will fit (39.5"H, With Top Pak) bodies...
- •(3)3", (1)5"-Drawer packages will fit (36"H, Non-Top Pak) bodies...
- $\bullet (3)3\text{"}, (1)5\text{"-Drawer packages will fit } (36\text{"H}, \text{With Top Pak}) \text{ bodies}...$
- •Drawers have a 200 lbs. capacity <u>evenly distributed</u>, (Drawer weight included in the 200 lbs., so payload capacity near 175 lbs.).
- •Note: Drawers are to be in the closed/stowed position when vehicle is not parked.
- •Includes a Top Cover Panel, (1) per Drawer Package...

[•]Mounting fasteners are included for attaching to Challenger ST II Body (nuts and bolts fasteners).

Drawer Packages for Vertical Compartment will have the first drawer starting at the compartment bottom offset & up from that point...

[•]Drawers are provided with divider slots on 2" centers (dividers every other slot).

[•]Note: All Challenger ST II compartment offsets from bottom of compartment to floor is: 14"...

[•]Note: "LT" & "T" Body applications with a drawer package has an interference with Bar Lock Option if added...



Distributor Price List Effective: January 1, 2021

DRAWER PACKAGES - MODULAR DESIGN (Bolt-on) HORIZONTAL COMPARTMENT WITH DIVIDERS - MODULAR DESIGN (Bolt-on)

PART	DRAWER WIDTH /	APPLICATION &	NO OF DIVIDERS	DRAWER	PRICE	EACH
NUMBER	COMPARTMENT WIDTH	COMPARTMENT DEPTH	PER DRAWER	PACKAGE	LOOSE*	INSTALLED*
214691	39.5" Width / 47.19"	VS, VST, VSL, VSLT x 14"	8	(1) 3"	\$264	\$320
214689	39.5" Width / 47.19"	VS, VST, VSL x 14"	8	(2) 3"	\$527	\$642
214690	39.5" Width / 47.19"	VS x 14"	8	(3) 3"	\$792	\$962
214703	39.5" Width / 47.19"	VD, VDT, VDL, VDLT x 20"	8	(1) 3"	\$264	\$320
214704	39.5" Width / 47.19"	VD, VDT, VDL x 20"	8	(2) 3"	\$527	\$642
214705	39.5" Width / 47.19"	VD x 20"	8	(3) 3"	\$792	\$962

^{*}Must specify installation location at time of order.

MATERIAL GAUGES

- •Drawer Housing 14 gauge high-spangled galvanized steel
- •Drawers 14 gauge high-spangled galvanized steel
- •Lower Support 12 gauge high-spangled galvanized steel
- •Dividers are 16 gauge steel G60 min spangle chem. dry
- •Top Cover Panel 14 gauge high-spangled galvanized steel

SPECIFICATIONS

- ·Curbside or Streetside installation.
- •Standard overall drawer depths of 11.56", & 17.56".
- ·Standard drawer height of 3".
- •Package design as Stackable / Modular drawers, & Bolt-In...
- •Horizontal drawer packages are mounted to the compartment bottom
- •Drawers have a 200 lbs. capacity <u>evenly distributed</u>, (Drawer weight included in the 200 lbs., so payload capacity near 175 lbs.).
- •Note: Drawers are to be in the closed/stowed position when vehicle is not parked.
- •Includes a Top Cover Panel, (1) per Drawer Package...

DRAWER DIVIDERS

PART		COMPARTMENT		PRICE EACH
NUMBER	DESCRIPTION	DEPTH	SIZE	LOOSE
216486	Dividers for 3" high drawers	14"	2.75" H x 10.50" L	\$3
216489	Dividers for 3" high drawers	20"	2.75" H x 16.50" L	\$4
216488	Dividers for 5" high drawers	14"	4.75" H x 10.50" L	\$4
216491	Dividers for 5" high drawers	20"	4.75" H x 16.50" L	\$5

[•]Dividers are 16 gauge steel G60 min spangle chem. dry

[•]Note: Pricing includes the deletion of any applicable trays from the required compartment that the Drawer Package is added.

[•]An order with a Drawer Package should reflect "Delete" the required compartment trays (\$0.00)...

[•]Mounting fasteners are included for attaching to Challenger ST II Body (nuts and bolts fasteners).

[•]Drawer Packages for Horizontal Compartment have the first drawer starting at the compartment bottom & up from that point...

[•]Drawers are provided with divider slots on 2" centers (dividers every other slot).



Distributor Price List Effective: January 1, 2021

FENDER KIT W/SCOOP (FOR CST 82" ONLY APPLICATION)

PART		PRICE	EEACH
NUMBE	R DESCRIPTION	LOOSE	INSTALLED
21270	CST82" RAM Fender kit w/Aluminum fuel fill (37"CA) with Front fuel fill cutout in Streetside fender panel, Curbside fender panel, & RAM Rear Mounting Brackets (Note: RAM Rear Mounting Brackets are shipped loose)	\$92	\$150
22486	CST82" RAM (Diesel Cap-Less) Fender kit w/2 Aluminum fuel fills (37"CA) with (1) "Gas" Front fuel fill cutout in Streetside fender panel, (1) "Diesel" Urea Front fuel fill cutout in Curbside fender panel, & RAM Rear Mounting Brackets (Note: RAM Rear Mounting Brackets are shipped loose)		\$247
21270	CST82" Ford Fender kit w/Aluminum fuel fill (40"CA) with Front fuel fill cutout in Streetside fender panel, & Curbside fender panel.	\$38	\$98
22237	CST82" Ford (Diesel) Fender kit w/ (2) Aluminum fuel fills (40"CA) with Dual (Front & Rear) fuel fill cutout in Streetside fender panel, & Curbside fender panel (Noting: that Streetside fender panel includes (1) Front "Gas" Fuel Fill, and (1) Rear "Diesel" Urea Fuel Fill).	\$76	\$194
21270	CST82" Chevy/GM Fender kit w/Aluminum fuel fill (42"CA) with Front fuel fill cutout in Streetside fender panel, & Curbside fender panel.	\$38	\$98

⁻All CST82" Bodies require CST82" Fender Kit (RAM = 37"CA, Ford = 40"CA, or GM = 42"CA) w/fuel fill to complete body assembly...

FENDER PANEL ASSEMBLY W/SCOOP

PART			PRICE EACH	
NUMBER	DESCRIPTION	APPLICATION	LOOSE	INSTALLED
186140-01	CST Fender Panel Assembly with (1) Aluminum fuel fill / Sugar Scoop "Front Location"	Streetside (1) Front Fuel Fill (For a 56"CA application) Also note: For a Ford F-350, SRW, 60"CA <under 10,000#="" gvw=""> applications</under>	\$41	\$104
186140-02	CST Fender Panel Assembly with (2) Aluminum fuel fill / Sugar Scoop "Dual = Front & Rear Location"	Streetside (2) Duel "Front & Rear" Fuel Fill (For a Chevy/GM - Up to a 3500 60" or 84"CA applications)	\$81	\$208
186140-03	CST Fender Panel Assembly with (1) Aluminum fuel fill / sugar Scoop "Rear Location"	Streetside (1) Rear Fuel Fill (For a Ford < Over 10,000# GVW> 60" or 84"CA applications, and/or For a RAM 60" or 84"CA applications)	\$40	\$104
186140-04	CST Fender Panel Assembly with "NO Fuel Fill / Sugar Scoop. Provided as Standard with all CST Bodies	Both the Streetside and Curbside Fender Panel Assemblies are provide with NO Cutout (and/or NO Fuel Fill, and NO Urea Fill) as Standard and are included with the All CST Bodies	NA	NA
186140-05	CST Fender Panel Assembly with (1) Aluminum fuel fill / Sugar Scoop = "Front Location", and (1) Aluminum fuel fill / Urea Scoop = "Rear Location"	Streetside (1) Front Fuel Fill and (1) Rear Urea Fill (For a Ford Diesel Pick-up / 56"CA applications)	\$81	\$208
186140-06	CST Fender Panel Assembly with (1) Aluminum fuel fill / Urea Scoop = "Rear Location" if Streetside (Noting this would be a Front location when used on the Curbside)	Streetside (1) Rear Urea Fuel Fill , but would be Curbside Front in this application. (For a Ford Diesel Cab Chassis that have Duel Fuel Tanks and is "Diesel" using #186140-02 for the Streetside, and would require this "Curbside Front Urea" applications, and/or For a RAM Diesel CapLess Pick-up that is "Diesel Cap-Less" using #186140-01 for the Streetside, and would require this "Curbside Front Urea" applications)	\$41	\$104
186140-07	CST Fender Panel Assembly with (1) Aluminum fuel fill / Urea Scoop = "Front Location", and (1) Aluminum fuel fill / Sugar Scoop = "Rear Location"	Streetside (1) Front Urea Fuel Fill and (1) Rear Fuel Fill (For a Ford Diesel Cab Chassis applications)	\$81	\$208
234934	CST Fender Panel Kit with Curbside Fender with no cutouts or fuel fills and Streetside Fender with Aluminum fuel fill / Sugar Scoop "Front Location"	2020 Chevy/GM with 55"CA	\$41	\$104
235011	CST Fender Panel Kit with Curbside and Streetside Fender having no cutouts or fuel fills	2021 Chevy/GM with 55"CA	\$0	\$0

[•]Add/Delete Streetside (and/or Curbside) Fender Panels to provide the required Fender Panel Assembly w/Scoop for your application...

[•]Fender Kits include: SS Fender panel w/Fuel Cutouts, CS Fender panel, Alum. fuel fill(s), & RAM Rear Brackets (as needed)...

[•]Noting RAM (37"CA) Rear mounting brackets are provided ILO Standard Rear brackets if installed at STAHL (as needed)...

[•]Fender Kit must be ordered with the Body at the same time...

[•]Loose Pricing: Streetside & Curbside Fender panels are installed, Aluminum fuel fill(s) are shipped loose...

 $[\]hbox{-}Installed \ Pricing: Streetside \& \ Curbside \ Fender \ panels \ are \ installed, \ and \ Aluminum \ fuel \ fill(s) \ are \ installed... }$

[•]Note: Ford Pick-up (Diesel) to have Dual cutouts in Streetside fender panel with Front Fuel Fill, and Rear Urea Fill...

[•]Note: RAM Pick-up (Diesel Cap-Less) to have Front "Gas" Fuel Fill in Streetside fender panel, and Front "Diesel" Urea Fill in Curbside fender panel...

[•]Fender Panel Assembly w/Scoop include: (1) Fender panel w/Fuel Cutouts and noted Gas, or Urea Aluminum fuel fills (as needed)...

[•]Loose Pricing: Streetside (and/or Curbside) Fender panel are installed, Aluminum fuel fill(s) are shipped loose...

[•]Installed Pricing: Streetside (and/or Curbside) Fender panel are installed, and Aluminum fuel fill(s) are installed...

[•]STAHL recommends Powder Coated Units be ordered with Fender Panel Assembly "Installed" (for your specific chassis application)...



Distributor Price List Effective: January 1, 2021

FUEL FILL (Aluminum Sugar Scoop)

PART			EACH
NUMBER	DESCRIPTION	LOOSE	INSTALLED
171578	Aluminum fuel fill and gasket	\$41	N/A
221049	Aluminum Urea fill and gasket (2011-Current Ford Diesel Only)	\$41	N/A

^{•221049} Aluminum Urea may be ordered (Optional) for a 2011-Current Ford Diesel Only ILO the Ford supplied Urea fill...

FUEL FILL "DEF" BRACKET KIT (Bolt-on)

PART			EACH
NUMBER	DESCRIPTION / APPLICATION	LOOSE	INSTALLED
229408	Supplemental Fuel fill "DEF" bracket kit (2017-Current) Ford Diesel 60"CA Only	\$46	\$75
235343	Supplemental Fuel fill "DEF" bracket kit (2020-Current) GM Diesel 42" CA thru 84"CA	\$46	\$75

[•]Note: This kit will replace the need for a DEF (or UREA) fuel fill location in the fenders when used...

- •Note: Bracket mounted to Streetside Front End Panel due to Rear Fuel Tank Option on Chassis.
- •The tank will be located Streetside front between the frame rails for DRW Trucks with a rear Fuel Tank.
- •Rear Fuel Tanks are standard on all Ford DRW Cab Chassis' (60/84" CA).
- Note: Bracket mounted to Curbside Front End Panel due to Mid-Ship Fuel Tank Option on Chassis.
- •The tank will be located curbside front OUTSIDE the frame rails for mid-ship fuel tank applications.
- •Fuel tanks are required to be mid-ship for all SRW Ford 60"CA Trucks due to fuel integrity and crash testing.
- •Mid-Ship Fuel Tanks are optional for Ford DRW Cab Chassis' (60/84" CA).

HEADACHE RACKS - PUNCHED (BOLT-ON)

PART		FLOOR	RACK	APPLICATIO	N	WEIGHT	PRICE	EACH
NUMBER	DESCRIPTION	WIDTH	HEIGHT	CHASSIS	HEIGHT		LOOSE	INSTALLED
231751	Punched Headache Rack	48.5"	18.00"	GM universal, or Ram Pickup	Standard	35	\$483	\$539
231717	Punched Headache Rack	52.5"	18.00"	GM universal, or Ram Pickup	Standard	35	\$483	\$539
231752	Punched Headache Rack	48.5"	Ford universal, or Ram Chassis Cab Standard	38	\$483	\$539		
201702	T different Floaddone Flack	10.0	21.20	GM universal, or Ram Pickup	Low Boy	30	Ψ100	Ψοσο
231753	Punched Headache Rack	52.5"	21.25"	Ford universal, or Ram Chassis Cab	Standard	38	\$483	¢ E20
231733	Punched Headache Rack	52.5	21.25	GM universal, or Ram Pickup	Low Boy		\$403	\$539
231757	Punched Headache Rack	48.5"	24.75"	Ford universal, or Ram Chassis Cab	Low Boy	41	\$483	\$539
231758	Punched Headache Rack	52.5"	24.75"	Ford universal, or Ram Chassis Cab	Low Boy	41	\$483	\$539

[•]Headache Racks are Powder Coated #200478 (Universal White) as Standard...

•Headache Rack Specifications:

- •12 gauge galvanneal Headache Rack panels, and gussets.
- •With stainless steel mounting fasteners, and sealing washers to secure Headache Racks to service body.
- All Headache Racks are pre-punched to allow visibility of Chassis Cab CHSML Light.

[•]Note that some applications may require a Supplemental Ford Fuel Hose kit.

[•]Specify on All Orders if they are to be Powder Coat, Finish Paint (Wet), or In Prime to avoid any confusion...

[•]See Paint Options Section if Headache Rack is NOT to be provided Powder Coated (Universal White) for pricing...

[•]Note: Some standard options (like: Low Sliding Roof, Ladder Racks, Add-On Top Paks, Tank Compartments, & Highroof, etc...) are NOT designed (as standard) to work with a Headache Rack, so please contact Inside Sales to confirm application and Special Pricing. (As needed)

[•]Note: Headache Racks (See above "Application" information) to help convey how to select the correct Headache Rack based off the following Factors: Chassis, Body Height "Low Boy" vs. "Standard". Three available Rack Height are needed...



Distributor Price List Effective: January 1, 2021

HIGHROOF (installed part numbers)

PART	INSIDE HEIGHT	BODY APPLICATION	ROOF	PRICE EACH	
NUMBER	INSIDE REIGHT	BODT APPLICATION	WEIGHT	LOOSE	INSTALLED
224851	53"	82" long / 14" deep compts. / 39.5" high / 48.5" floor	427#	\$2,491	\$2,959
222161	53"	98" long / 14" deep compts. / 39.5" high / 48.5" floor	487#	\$2,588	\$3,056
223865	60"	98" long / 14" deep compts. / 39.5" high / 48.5" floor	538#	\$2,705	\$3,159
224468	53"	98" long / 20" deep compts. / 39.5" high / 52.5" floor	531#	\$2,834	\$3,301
223532	60"	98" long / 20" deep compts. / 39.5" high / 52.5" floor	577#	\$2,944	\$3,412
223209	60"	110" long / 14" deep compts. / 39.5" high / 48.5" floor	540#	\$2,839	\$3,306
224521	74"	110" long / 14" deep compts. / 39.5" high / 48.5" floor	661#	\$3,203	\$3,670
224562	60"	110" long / 20" deep compts. / 39.5" high / 48.5" floor	623#	\$3,084	\$3,549
223465	74"	110" long / 20" deep compts. / 39.5" high / 48.5" floor	762#	\$3,594	\$4,059
222684	60"	110" long / 20" deep compts. / 39.5" high / 52.5" floor	648#	\$3,122	\$3,590
222369	74"	110" long / 20" deep compts. / 39.5" high / 52.5" floor	778#	\$3,672	\$4,139
223269	60"	134" long / 20" deep compts. / 39.5" high / 52.5" floor	722#	\$3,425	\$3,892
223047	74"	134" long / 20" deep compts. / 39.5" high / 52.5" floor	868#	\$4,056	\$4,525
CRATE		Crate for Highroof shipped loose		\$604	

[•]Customer to provide chassis information to help determine correct application:

•Note: See Under 10,001 GVW Chassis / Highroof Application Guideline (Longbeds)...

•Note: Highroof Pricing includes the standard STAHL rear LED ID light kit w/harness on all Under & Over 80" wide bodies...

•Note: Highroof do NOT work with Top Pak Bodies.

•Note: Highroof Pricing (Installed) includes the deduction of slam-action tailgate from the base body...

*Note: Highroof work with All Challenger ST II Bodies: "VV, CC, CV, & VC" Application. This would also include bodies With or Without "NWB" extension (No Wheel box).

•Note: Some Highroof options may require the Highroof to go through Engineering (#SPL), depending on the application, and/or added Highroof Options (i.e. Side Doors, Side Windows, etc.)

•Note: See STAHL Challenger ST II Highroof Specification Sheet for additional Information...

•Note: A Highroof loose application will require Engineering (#SPL).

[•]Year, Make, Model, GVW, (SRW or DRW), (4x2 / 4x4), (Gas / Diesel), Engine size, & Cab-to-Axle...

[•]Above Highroof part numbers are for installed applications, and must be ordered with body at the same time.

[•]Highroof pricing includes Pricing for Powder Coat (Universal White).

[•]Powder Coat #200478 (Universal White) is standard for STAHL products, unless an option notes otherwise...

[•]Specify on All Orders (Bodies, as well as Options) if they are to be Powder Coat, Finish Paint (Wet), or In Prime to avoid any confusion...

[•]Highroof is not recommended for low profile bodies, but are available upon request...

^{•60&}quot; & 74" Highroof heights are only available for a Chassis application that has "Over 10,000# GVW".



Distributor Price List Effective: January 1, 2021

UNDER 10,001 GVW CHASSIS / HIGHROOF APPLICATION GUIDELINE (LONGBEDS)

FORD TRUCKS WITH 8' BEDS							
MODEL	TYPE (4X2, 4X4, or Both)	CAB TYPE	GAS / DIESEL	MAX HEIGHT HIGHROOF			
Ford F-250	Both	Regular Cab	Both	37" Highroof			
Ford F-250	Both	Super Cab	Both	57" Highroof			
Ford F-250	4X2	Crew Cab	Both	57" Highroof			
Ford F-250	4X4	Crew Cab	Both	37" Highroof			
Ford F-350	Both	Regular Cab	Both	37" Highroof			
Ford F-350	Both	Super Cab	Both	57" Highroof			
Ford F-350	4X2	Crew Cab	Both	57" Highroof			
Ford F-350	4X4	Crew Cab	Both	37" Highroof			

GM TRUCKS WITH 8' BEDS							
MODEL	TYPE (4X2, 4X4, or Both)	САВ ТҮРЕ	GAS / DIESEL	MAX HEIGHT HIGHROOF			
GM 2500 C/K25903	Both *	Regular Cab *	Both *	46" Highroof			
GM 2500 C/K25953	Both	Extended Cab	Gas	46" Highroof			
GM 2500 C/K25953	Both	Extended Cab	Diesel	NONE			
GM 2500 C/K25943	Both	Crew Cab	Gas	46" Highroof			
GM 2500 C/K25943	Both	Crew Cab	Diesel	NONE			
GM 3500 <10,001 GVW	Both	ALL	Both	NONE			

[•]Note: (*) = C25903 that is (4X2) with (6.0L Vortec V-*) and Exactly 10,000 GVW, Highroof "NOT PERMITTED!...

RAM TRUCKS WITH 8' BEDS							
MODEL TYPE (4X2, 4X4, or Both		САВ ТҮРЕ	GAS / DIESEL	MAX HEIGHT HIGHROOF			
RAM 2500	Both	Regular Cab	Both	60" Highroof			
RAM 2500	Both	Crew Cab	5.7L Gas	60" Highroof			
RAM 2500	4X2	Crew Cab	6.4L Gas	60" Highroof			
RAM 2500	4X4	Crew Cab	6.4L Gas	53" Highroof			
RAM 2500	Both	Crew Cab	6.7L Diesel	NONE			

[•]Each manufacturer now uses the following to judge what is allowed and what is not:

- Center of Gravity
- •Frontal Area
- •Maximum Unloaded Vehicle Weight
- •When calling with application questions, please have: Cab Type, Drive (4X2 or 4X4), GVWR, and Engine RPO available.
- •Note: GM Shortbeds (42"CA / CST82 Bodies) will have to be handled Case-By-Case.
- •Note: Please note that Trucks OVER 10,001 GVWR are currently NOT affected.
- •Note: The above Chassis / Highroof Guideline ONLY applies to Under 10,001 GVW Chassis application (Longbed Trucks)...
 - •Note: Highroof Heights shown are maximum allowable...
 - •Note: Standard Highroof Heights are: 53", 60", and 74"...
 - •Note: Any other Highroof Heights are custom and would require Engineering (#SPL)...
- •Contact your Inside Sales Representative for pricing on your Custom Height Highroof...
 •Note: Floor to top of compartment on a Challenger ST II (Standard Height) is 25.5", so a 37" Highroof adds 11.5"..
- •Note: On SRW trucks (Over 10,001 GVW), do NOT exceed 60" Highroof Height without consulting Inside Sales / Engineering...



Distributor Price List Effective: January 1, 2021

HIGHROOF OPTIONS

PART			PRICE EACH		
NUMBER	DESCRIPTION	APPLICATION	LOOSE	INSTALLED	
SPL	Delete rear doors from Highroof	All Highroof	n/a	(\$142)	
232557	Bulkhead without window, ILO Std. Bulkhead with window	53" Highroof w/48.5" floor	n/a	(\$48)	
224392	Bulkhead without window, ILO Std. Bulkhead with window	53" Highroof w/52.5" floor	n/a	(\$48)	
223585	Bulkhead without window, ILO Std. Bulkhead with window	60" Highroof w/48.5" floor	n/a	(\$48)	
SPL	Bulkhead without window, ILO Std. Bulkhead with window	60" Highroof w/52.5" floor	n/a	(\$48)	
SPL	Bulkhead without window, ILO Std. Bulkhead with window	74" Highroof w/48.5" floor	n/a	(\$48)	
224357	Bulkhead without window, ILO Std. Bulkhead with window	74" Highroof w/52.5" floor	n/a	(\$48)	
225946-01	Add (1) Conduit Door Kit mounted on Streetside rear panel of Highroof. Located just above the compartment top.	All (53" Highroof) with 14" deep compartments	n/a	\$224	
225946-02	Add (1) Conduit Door Kit mounted on Curbside rear panel of Highroof. Located just above the compartment top.	All (53" Highroof) with 14" deep compartments	n/a	\$224	
234287-01	Add (1) Conduit Door Kit mounted on Streetside rear panel of Highroof. Located just above the compartment top.	All (53" Highroof) with 20" deep compartments	n/a	\$224	
234287-02	Add (1) Conduit Door Kit mounted on Curbside rear panel of Highroof. Located just above the compartment top.	All (53" Highroof) with 20" deep compartments	n/a	\$224	
223866-01	Add (1) Conduit Door Kit mounted on Streetside rear panel of Highroof. Located just above the compartment top.	All (60" Highroof) with 14" deep compartments	n/a	\$224	
223866-02	Add (1) Conduit Door Kit mounted on Curbside rear panel of Highroof. Located just above the compartment top.	All (60" Highroof) with 14" deep compartments	n/a	\$224	
223339-01	Add (1) Conduit Door Kit mounted on Streetside rear panel of Highroof. Located just above the compartment top.	All (60" Highroof) with 20" deep compartments	n/a	\$224	
223339-02	Add (1) Conduit Door Kit mounted on Curbside rear panel of Highroof. Located just above the compartment top.	All (60" Highroof) with 20" deep compartments	n/a	\$224	
224626-01	Add (1) Conduit Door Kit mounted on Streetside rear panel of Highroof. Located just above the compartment top.	All (74" Highroof) with 20" deep compartments	n/a	\$224	
224626-02	Add (1) Conduit Door Kit mounted on Curbside rear panel of Highroof. Located just above the compartment top.	All (74" Highroof) with 20" deep compartments	n/a	\$224	
222668	(2) Load-space LED dome lights, with switch on light and (2) mounting brackets, with (1) #169603 recessed switch and cup assembly	All Highroof	\$235	\$305	
223335	(1) Load-space LED dome lights, with switch on light and (1) mounting brackets, with (1) #169603 recessed switch and cup assembly	All Highroof	\$143	\$188	
228033	(1) Load-space LED dome light, with switch on light and (1) mounting bracket	All Highroof	\$92	\$117	
169603	(1) Recessed switch and cup assembly with (1) mounting bracket	All Highroof	\$54	\$69	

•Note: At time printing "SPL" = Engineering Required, so lead-time would be longer than standard product.



Distributor Price List Effective: January 1, 2021

HIGHROOF OPTIONS

PART			PRICE	EACH
NUMBER	DESCRIPTION	APPLICATION	LOOSE	INSTALLED
230869	Door Screen Assembly - 16 gauge punched metal - Each window. Includes fasteners.	Rear door window	n/a	\$101
164920	Screen - 16 gauge punched metal - each window	Side window	n/a	\$101
213270	Left rear door without window	53" Highroof w/48.5" floor	n/a	(\$48)
213269	Right rear door without window	53" Highroof w/48.5" floor	n/a	(\$48)
213477	Left rear door without window	53" Highroof w/52.5" floor	n/a	(\$48)
213478	Right rear door without window	53" Highroof w/52.5" floor	n/a	(\$48)
216689	Left rear door without window	60" Highroof w/48.5" floor	n/a	(\$48)
216690	Right rear door without window	60" Highroof w/48.5" floor	n/a	(\$48)
208358	Left rear door without window	60" Highroof w/52.5" floor	n/a	(\$48)
208359	Right rear door without window	60" Highroof w/52.5" floor	n/a	(\$48)
SPL	Left rear door without window	74" Highroof w/48.5" floor	n/a	(\$48)
SPL	Right rear door without window	74" Highroof w/48.5" floor	n/a	(\$48)
213153	Left rear door without window	74" Highroof w/52.5" floor	n/a	(\$48)
213154	Right rear door without window	74" Highroof w/52.5" floor	n/a	(\$48)
SPL	Rear door window (extra - one is standard)	All Highroof	n/a	\$111

•Note: At time printing "SPL" = Engineering Required, so lead-time would be longer than standard product.



Distributor Price List Effective: January 1, 2021

HIGHROOF OPTIONS

PART				EACH
NUMBER	DESCRIPTION	APPLICATION	LOOSE	INSTALLED
SPL	Lift-up side doors in roof, 2 per side (one side - must call out quantity of 2 for both sides) (Ref.: #207397)	CST98S w/60" Highroof	n/a	\$701
SPL	Lift-up side doors in roof, 2 per side (one side - must call out quantity of 2 for both sides) (Ref.: #207141)	CST98D w/60" Highroof	n/a	\$701
227965	Lift-up side doors in roof, 2 per side (one side - must call out quantity of 2 for both sides)	CST110S w/60" Highroof	n/a	\$701
SPL	Lift-up side doors in roof, 2 per side (one side - must call out quantity of 2 for both sides) (Ref.: #207476)	CST110S w/74" Highroof	n/a	\$701
233363	Lift-up side doors in roof, 2 per side (one side - must call out quantity of 2 for both sides)	CST110D w/60" Highroof	n/a	\$701
229119	Lift-up side doors in roof, 2 per side (one side - must call out quantity of 2 for both sides)	CST110D w/74" Highroof	n/a	\$701
230228	Lift-up side doors in roof, 2 per side (one side - must call out quantity of 2 for both sides)	CST134D w/60" Highroof	n/a	\$701
231867	Lift-up side doors in roof, 2 per side (one side - must call out quantity of 2 for both sides)	CST134D w/74" Highroof	n/a	\$701
SPL	Four (4) 8" x 32" non-opening side windows (2 per side)	All Highroof	\$473	\$674
224869	Window Kit: Four (4) 8" x 32" non-opening side windows in Highroof, (2 per side of roof)	CST82S w/53" Highroof	\$443	\$674
224601	Window Kit: Four (4) 8" x 32" non-opening side windows in Highroof, (2 per side of roof)	CST98S w/53" Highroof	\$443	\$674
224603	Window Kit: Four (4) 8" x 32" non-opening side windows in Highroof, (2 per side of roof)	CST98S w/60" Highroof	\$443	\$674
224605	Window Kit: Four (4) 8" x 32" non-opening side windows in Highroof, (2 per side of roof)	CST98D w/53" Highroof	\$443	\$674
224654	Window Kit: Four (4) 8" x 32" non-opening side windows in Highroof, (2 per side of roof)	CST98D w/60" Highroof	\$443	\$674
224674	Window Kit: Four (4) 8" x 32" non-opening side windows in Highroof, (2 per side of roof)	CST110S w/60" Highroof	\$443	\$674
224676	Window Kit: Four (4) 8" x 32" non-opening side windows in Highroof, (2 per side of roof)	CST110S w/74" Highroof	\$443	\$674
224688	Window Kit: Four (4) 8" x 32" non-opening side windows in Highroof, (2 per side of roof)	CST110D w/60" Highroof	\$443	\$674
224691	Window Kit: Four (4) 8" x 32" non-opening side windows in Highroof, (2 per side of roof)	CST110D w/74" Highroof	\$443	\$674
224784	Window Kit: Four (4) 8" x 32" non-opening side windows in Highroof, (2 per side of roof)	CST134D w/60" Highroof	\$443	\$674
224777	Window Kit: Four (4) 8" x 32" non-opening side windows in Highroof, (2 per side of roof)	CST134D w/74" Highroof	\$443	\$674
<u> </u>				1

[•]Note: Side windows and Lift-up Side Access Door options ordered together for a Highroof application will require Engineering...

[•]Note: Lift-up Side Access Door options for a 53" Highroof are NOT available as standard, but can be special quoted upon request. Please contact your Inside Sales Representative for pricing.

[•]Note: At time printing "SPL" = Engineering Required, so lead-time would be longer than standard product.



Distributor Price List Effective: January 1, 2021

HITCHES (Bolt-on)

 	(201: 011)			
PART		P		EACH
NUMBER	DESCRIPTION	APPLICATION	LOOSE	INSTALLED
144155	Bolt-on ball hitch plate for recessed bumper Recessed bumpers		\$59	\$100
235025	Receiver Hitch - 2" Class III/IV	Recessed bumpers	\$245	\$324
232771	71 Trailer Plug - 7-Way Recessed bumpers		\$21	\$67
232772	772 Trailer Plug - 6-Way Recessed bumpers		\$21	\$67
209721	209721 Hitch Asm, 2.5" Class 5 (V) Bolt-on Recessed bumpers		\$679	\$762
209737	Adapter - 2.5" to 2.0" Tube (Converts a 2.5 Receiver Hitch to a 2.0" Receiver Hitch)	Use with 2.5" - Class 5 (V) Receiver Hitch Reinf. Asm	\$33	\$41
932004	Pintle Hook (15 Ton) Model #PH15 (Bolt-on) Rigid Mount. Pintle Capacity: 6,000# Maximum vertical load / tongue weight, 30,000# Maximum gross trailer weight. Reinforcement required for mounting on bumper.		\$82	\$163
224905	Pintle hitch reinforcement for recessed bumpers (loose); 60" & 84"CA cab-to-axle 34" frames only. Required for mounting Pintle hitch on bumper. Includes 1/2" "D" rings as standard, with fasteners.		\$281	\$421
224912	Pintle hitch reinforcement for recessed bumpers (loose); For 42" wide frame only. Required for mounting Pintle hitch on bumper. Includes 1/2" "D" rings as standard, with fasteners.		\$281	\$421

[•]Finish Painted (Wet) #134291 DTM (Black) is Standard for above (In house manufactured) Options and is included within the price.

[•]Note: Any above (Purchased) above Options are Finish Painted (Black) as standard from supplier.

[•]Bolt-on Ball Hitch Plate Assembly (#144155) capacity: 500# tongue weight / 5,000# trailer weight.

^{•2.0&}quot; Receiver Hitch Reinforcement Assemblies are Class III / IV with a capacity: 1,000# tongue weight / 10,000# trailer weight.

^{•7} way connector is round with a flat-prong - RV style. 6 way connector is round-pin.

^{•2.5&}quot; Receiver Hitch Reinforcement Assemblies are Class 5 (V) with a capacity: 2,000# tongue weight / 15,000# trailer weight.

[•]Pintle hitch reinforcement (#224905 & #224912) capacity: 3,000# vertical load / tongue weight, 20,000# trailer weight.

[•]Note: See Hitch Options for Factory Hitch mounting brackets to allow OEM Factory Hitch to work with Standard Body & Bumper. This option should be ordered at the same time as your body...

Please note that various hitches are NOT designed to work together. Like a Ball Hitch Plate and a Receiver hitch.

See Crane Section of your Price Book for Optional Outrigger (Bolt-On) & Bumpers designed to work together.

[•]Note: Pintle Hook Model information is subject to change without notice / Reference Only. Equivalent will be supplied.

[•]Note: Factory hitch must be used on all 2017-Current 56" CA Ford Chassis



Distributor Price List Effective: January 1, 2021

HITCHES (Bolt-on)

PART			PRICE	EACH
NUMBER	DESCRIPTION	APPLICATION	LOOSE	INSTALLE
159300-03, ILO Std. Rear Brackets	Factory Hitch mounting brackets (allow for the use of GM and Ford factory hitches with Challenger ST II service bodies). For (2003-2010) Chassis applications. *Note: 159301 hitch adapter is also required for GM factory hitches. *Note: Only works with recess bumpers. <ordered #228846-01="" &="" (ilo="" -02="" at="" body="" brackets="" brackets)="" bumper="" current="" mounting="" rear="" same="" standard="" time="" with=""> Loose, or Installed - if Body is ordered Installed.</ordered>		No Charge	No Charge
159300-03	Factory Hitch mounting brackets (allow for the use of GM and Ford factory hitches with Ch (2003-2010) Chassis applications. *Note: 159301 hitch adapter is also required for GM fact recess bumpers. <ordered "not="" boo<="" ordered="" separately="" td="" with=""><td>ory hitches. *Note: Only works with</td><td>\$58</td><td>n/a</td></ordered>	ory hitches. *Note: Only works with	\$58	n/a
230904-03, ILO Std. Rear Brackets	Factory Hitch mounting brackets (allow for the use of GM, and Ford factory hitches with Challenger ST II service bodies). For (2011-Current) GM Chassis, and (2011-2016) Ford Chassis applications. *Note: 159301 hitch adapter is also required for GM factory hitches. *Note: Only works with recess bumpers. <ordered #228846-01="" &="" (ilo="" -02="" at="" body="" brackets="" brackets)="" bumper="" current="" mounting="" rear="" same="" standard="" time="" with=""> Loose, or Installed - if Body is ordered Installed.</ordered>		No Charge	No Charge
230904-03	Factory Hitch mounting brackets (allow for the use of GM and Ford factory hitches with Ch (2011-Current) GM Chassis, and (2011-2016) Ford Chassis applications. *Note: 159301 hit factory hitches. *Note: Only works with recess bumpers. <ordered "n<="" separately="" td=""><td>tch adapter is also required for GM</td><td>\$58</td><td>n/a</td></ordered>	tch adapter is also required for GM	\$58	n/a
228800-03, ILO Std. Rear Brackets	ear OEM Brackets, as it does not have a provision for an aftermarket hitch. *Note: Only works with recess bumpers. <ordered< td=""><td>No Charge</td><td>No Charge</td></ordered<>		No Charge	No Charge
228800-03	Factory Hitch mounting brackets (allow for the use of Ford factory hitches with Challenger ST II service bodies). For (2017-		\$97	n/a
234921-03, ILO Std. Rear Brackets	Std. Rear Factory Hitch mounting brackets for 2020 GM/Chevy 42"CA and 55"CA applications. Loose or installed with new body order		No Charge	No Charge
234921-03	234921-03 Factory Hitch mounting brackets for 2020 GM/Chevy 42"CA and 55"CA applications. <ordered "not="" body="" ordered="" separately="" with=""></ordered>		\$58	n/a
159301	(2003-2016) GM factory hitch adapter - must use #159300-03 (2003-2010) OEM Hitch #230904-03 (2011-2016) OEM Hitch mounting brackets	ch mounting brackets and/or	\$44	\$108

[•]Finish Painted (Wet) #134291 DTM (Black) is Standard for above (In house manufactured) Options and is included within the price.

[•]Note: Any above (Purchased) above Options are Finish Painted (Black) as standard from supplier.

[•]Note: See Hitch Options for Factory Hitch mounting brackets to allow OEM Factory Hitch to work with Standard Body & Bumper. This option should be ordered at the same time as your body..

[•]Please note that various hitches are NOT designed to work together. Like a Ball Hitch Plate and a Receiver hitch.
•Note: Factory hitch must be used on all 2017-Current 56" CA Ford Chassis



Distributor Price List Effective: January 1, 2021

HOOKS - SWIVEL "J" HOOKS (Bolt-on)

PART	1	APPLICATION	PRICE EACH	
NUMBER	DESCRIPTION	(MTG PLATE WIDTH / COMPT WIDTH)	LOOSE	INSTALLED*
SPL	(1) Hook Assembly with (2) 4" Swivel "J"-shaped hooks on mounting plate	Mounts to shelf brackets. 9.31" Width / 13.41" wide compartment	\$106	\$158
213833	(1) Hook Assembly with (3) 4" Swivel "J"-shaped hooks on mounting plate	Mounts to shelf brackets. 16.88" Width / 21" wide compartment	\$158	\$207
SPL	(1) Hook Assembly with (3) 4" Swivel "J"-shaped hooks on mounting plate	Mounts to shelf brackets. 17.38" Width / 21.41" wide compartment	\$158	\$207
SPL	(1) Hook Assembly with (3) 4" Swivel "J"-shaped hooks on mounting plate	Mounts to shelf brackets. 20.00" Width / 24" wide compartment	\$158	\$207
210956	(1) Hook Assembly with (4) 4" Swivel "J"-shaped hooks on mounting plate	Mounts to shelf brackets. 16.88" Width / 21" wide compartment	\$209	\$260
SPL	(1) Hook Assembly with (4) 4" Swivel "J"-shaped hooks on mounting plate	Mounts to shelf brackets. 17.38" Width / 21.41" wide compartment	\$209	\$260
SPL	(1) Hook Assembly with (4) 4" Swivel "J"-shaped hooks on mounting plate	Mounts to shelf brackets. 20.00" Width / 24" wide compartment	\$209	\$260
210378	(1) Hook Assembly with (4) 4" Swivel "J"-shaped hooks on mounting plate	Mounts to shelf brackets. 25.69" Width / 29.81" wide compartment	\$209	\$260
213096	(1) Hook Assembly with (4) 4" Swivel "J"-shaped hooks on mounting plate	Mounts to shelf brackets. 29.38" Width / 33.44" wide compartment	\$209	\$260
SPL	(1) Hook Assembly w/(1) 4" Swivel "J"- shaped hook	Individual mount	\$52	\$102

[•] Mounting fasteners are included for attaching to Challenger ST II Body (nuts and bolts fasteners).

INSTALLATION (Body)

PART			PRICE EACH
NUMBER	DESCRIPTION	APPLICATION	INSTALLATION
INSTALL	Factory Installation of CST Body	82" / 98" Challenger ST II	\$623
INSTALL	Factory Installation of CST Body	110" Challenger ST II	\$652
INSTALL	Factory Installation of CST Body	134" Challenger ST II	\$695
235492	Upfit Documentation Kit (Incl. 2nd Stage MSO)	All Stahl upfit bodies	\$0

[•]Installation includes installing the following (actual products are priced separately):

•Body - loose (order separately)

Light Kit - installed (order separately)

•Bumper - loose (order separately)

•Alum. Fuel Fill - installed (order separately)

•Adaptor Plug - loose (order separately) •Various Supp. Kits - loose (order separately)

INSTALLATION (Chassis Modification)

PART NUMBER	DESCRIPTION	APPLICATION	PRICE EACH INSTALLATION
MOD	Dealer to Modify Chassis to re-set computer for lighting requirements	82" / 98" Challenger ST II (GM/Chevy, Ford, pick up box removal applications) *See notes below for more details	\$335

[•] Note: The above part number "MOD" applies to the following:

- GM/Chevy (2007-Current) pick-up box removal applications
- Ford (2017-Current) pick-up box removal applications (see Ford SVE Bulletin #Q-261R1)
- RAM (2006-Current) pick-up box removal application
- Note: STAHL to take to a local Dealer to reset chassis computer to work with STAHL body light kit

[•] Note: At time of printing "SPL" = Engineering Required, so lead-time would be longer than standard product.

[•]Temporary mounting is not available due to chassis manufacturer requirements.




Distributor Price List Effective: January 1, 2021

LADDER RACK - OVERHEAD (Bolt-on - FlexStrut Channel Construction)

PART		PRICE EACH		
NUMBER	DESCRIPTION	APPLICATION	LOOSE	INSTALLED
213248	Bow Type Ladder Rack (Spans Load-Space) 25.76" High	CST82 w/48.5" wide floor	\$620	\$744
208929	Bow Type Ladder Rack (Spans Load-Space) 25.76" High	CST98 w/48.5" or 52.5" floor	\$620	\$744
213338	Bow Type Ladder Rack (Spans Load-Space) 25.76" High	CST110 w/48.5" or 52.5" floor	\$620	\$744
211780	Bow Type Ladder Rack (Spans Load-Space) 25.76" High	CST134 w/48.5" or 52.5" floor	\$620	\$744
203011	Tie-Down Kit: (8) "D-Ring" Tie-Downs with fasteners for use on above ladder racks.	All FlexStrut Channel ladder racks	\$41	n/a

- •Finish Painted (Wet) #134291 DTM (Black) is Standard for this Option and is included within the price.
- •1000 pound maximum weight capacity evenly distributed. Do not exceed the GVWR of the Vehicle.
- •Constructed of FlexSmart channels allowing for optional tie-down rings, strapping. Multiple tie off point for different sizes of material.
- •Overall Sizes once assembled: 32" High, 74" Wide at base, 27" from compartment top to top of horizonatl crossbars.
 - •Inside clearance between legs is: 61.4" (between mounting brackets).
- •Mounting fasteners are included for attaching to Challenger ST II Body. Installation Instructions to be provided for loose applications.
- •Note: None of the above Ladder Racks are designed for a 4500, or 5500 Chassis application. Additional Height is required...






LADDER RACK - OVERCAB (Bolt-on - FlexStrut Channel Construction)

PART	PART		PRICE EACH	
NUMBER	DESCRIPTION	APPLICATION	LOOSE	INSTALLED
230715-82	Bow Type Ladder Rack (Spans Load-Space) 25.76" High	CST82 w/48.5" wide floor	\$693	\$843
230715-98	Bow Type Ladder Rack (Spans Load-Space) 25.76" High	CST98 w/48.5" or 52.5" floor	\$693	\$843
230715-110	Bow Type Ladder Rack (Spans Load-Space) 25.76" High	CST110 w/48.5" or 52.5" floor	\$693	\$843
230715-134	Bow Type Ladder Rack (Spans Load-Space) 25.76" High	CST134 w/48.5" or 52.5" floor	\$693	\$843
203011	Tie-Down Kit: (8) "D-Ring" Tie-Downs with fasteners for use on above ladder racks.	All FlexStrut Channel ladder racks	\$41	n/a

- •Finish Painted (Wet) #134291 DTM (Black) is Standard for this Option and is included within the price.
- •1000 pound maximum weight capacity evenly distributed. Do not exceed the GVWR of the Vehicle.
- *Constructed of FlexSmart channels allowing for optional tie-down rings, strapping. Multiple tie off point for different sizes of material.
- $\bullet \text{Overall Sizes once assembled: 32" High, 74" Wide at base, 27" from compartment top to top of horizonatl crossbars. } \\$
 - •Inside clearance between legs is: 61.4" (between mounting brackets).
- •Mounting fasteners are included for attaching to Challenger ST II Body. Installation Instructions to be provided for loose applications.
- •Note: None of the above Ladder Racks are designed for a 4500, or 5500 Chassis application. Additional Height is required...

Ref.: Image shows #230715-98





Distributor Price List Effective: January 1, 2021

LADDER RACK - OVERHEAD OPTIONS (FlexSmart Channel LDR)

PART			PRIC	E EACH
NUMBER DESCRIPTION		APPLICATION	LOOSE	INSTALLED*
201292	Awning 8' w/Manual crank, Carmel Fade Vinyl fabric	Mounts to CST98 w/48.5" or 52.5" floors. Must be ordered with Ladder Rack (Overhead) FlexSmart Channel	\$1,434	\$1,498
201296	Pipe / Conduit Tube Holder Assembly (6" Dia. PVC x 10'L)	Mounts to CST98/CST110 w/48.5" or 52.5" floors. Must be ordered with Ladder Rack (Overhead) FlexSmart Channel	\$282	\$307
201306	Outside Work Light Assembly with harness	Mounts to Any CST Body. Must be ordered with Ladder Rack (Overhead) FlexSmart Channel	\$162	\$192

^{•300} pound maximum weight capacity for the Pipe / Conduit Tube Holder Assembly. Do not exceed the GVWR of the Vehicle.

LADDER RACK - SIDE MOUNT (BODY) COMPARTMENT TOP (Bolt-on)

		· · · · · · · · · · · · · · · · · · ·	,	,	
Γ	PART			PRICE	EACH
	NUMBER	DESCRIPTION	APPLICATION	LOOSE	INSTALLED*
	210577	Single Side (Side Mount)	All CST98 and CST110 bodies	\$551	\$632

[•]Painted direct to metal (Gloss Black) is standard for this option and is included within the price.

LADDER RACKS - HIGHROOF APPLICATIONS (Bolt-on)

PART			PRICI	EACH				
NUMBER	DESCRIPTION	APPLICATION	LOOSE	INSTALLED				
205744	Side-mount ladder rack (adjustable) *	All 53" & 60" Highroof (For 98", 110", 134" bodies)	\$745	\$927				
224987	Side-mount ladder rack (adjustable) *	All 74" Highroof (For 98", 110", 134" bodies)	\$745	\$927				
224436	Roof-top ladder rack with 2 bows	w/48.5 floor	\$448	\$577				
225117	225117 Roof-top ladder rack with 2 bows		\$448	\$577				
223499	Roof-top ladder rack with 3 bows	w/48.5 floor	\$505	\$636				
223223	Roof-top ladder rack with 3 bows	w/52.5 floor	\$505	\$636				

[•]Powder Coated #200478 (Universal White) is Standard for this Option and is included within the price.

[•]Mounting fasteners are included for attaching to FlexSmart System (combo nuts and bolts FlexSmart fasteners).

[•]Above Ladder Rack Options are only valid on the Ladder Rack (Overhead and Overcab) made from FlexSmart channels.

^{*}Must specify installation location (curbside / streetside, etc...) at time of order.

[•]Side Mount Ladder include (2) Ladder Rails that are approximately 2" x 4.5" x 120" long.

^{*}Installation location must be specified at time of order. Curbside, or Streetside for side mounted ladder rack.

[•]Note: Side Mount Ladder Rack is not current designed to work with Low Sliding Roof Option. Contact Engineering to confirm...

^{*}Installation location must be specified at time of order. Curbside, or Streetside for side mounted ladder rack.



Distributor Price List Effective: January 1, 2021

LADDER RACK - OVERCAB (Bolt-on)


PART	1 202.		PRICE EACH	
NUMBER			LOOSE	INSTALLED
230605-98 Ladder Rack/Overcab Spans load space, extends overcab		98"	\$710	\$855
230605-110	Ladder Rack/Overcab Spans load space, extends overcab	110"	\$752	\$896
230605-134	Ladder Rack/Overcab Spans load space, extends overcab	134"	\$752	\$896

•Note: Specify on order if Ladder Rack is shipped loose or installed

•Note: Not compatible with Top Pak bodies. FlexStrut Overcab Ladder Rack must be used for Top Pak application (see pg. 25).

SPECIFICATIONS

- •Finish Painted (Black) "Wrinkle" finish powder coat with rust inhibitor
- •1,000 lb. cargo load capacity.
- •13.5' overall length with standard cab front bow (for a 98" and 110")
- •14.5' overall length with standard cab front bow (for a 134")
- •1-7/8" Dia. 16 gauge steel tube construction.
- •Removable rear crossbar for easy access to load-space area.
- •62" between side rails.
- •Bolted construction for simple assembly.
- •Adjustable height (21-30") for multiple chassis / body applications.
- •Note: Will NOT currently work with Top Paks
- •Is compatible with low sliding roofs.
- •Weight: 155 lb. (for a 98" and 110")
- •Weight: 159 lb. (for a 134")

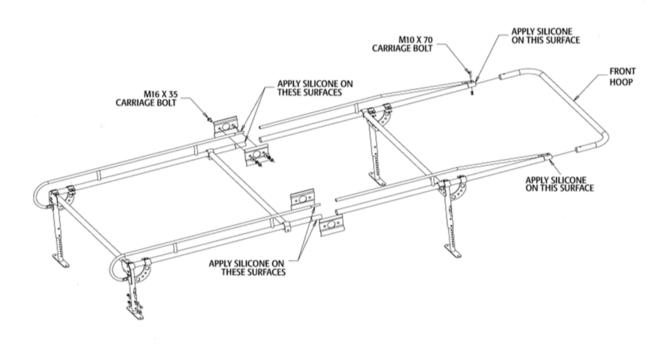



Distributor Price List Effective: January 1, 2021

LIGHT KITS - LED (SURFACE MOUNTED)

PART			PRICE EACH	
NUMBER	DESCRIPTION	BODY APPLICATION	LOOSE	INSTALLED
230523	Under 80" LED (Surface Mounted) Light kit - For installation to: Service Body rear end panels	All CST Bodies Under 80" in width (14" deep compartments with 48.5" floors type application)	\$245	\$340
230522	Over 80" LED (Surface Mounted) Light kit - For installation to: Service Body rear end panels	All CST Bodies Over 80" in width (14" deep compartments with 52.5" floors, or 20" deep compartments with 48.5" or 52.5" floors type applications)	\$341	\$452
230525	Under 80" LED (Surface Mounted) Light kit - For installation to: Bumper riser surface	All CST Bumpers Under 80" in width (14" deep compartments with 48.5" floors type application)	\$245	\$340
230524	Over 80" LED (Surface Mounted) Light kit - For installation to: Bumper riser surface	All CST Bumpers Over 80" in width (14" deep compartments with 52.5" floors, or 20" deep compartments with 48.5" or 52.5" floors type applications)	\$341	\$452

[•]All light kits are a 1-light system (Surface Mounted)

LIGHT KITS - AMBER STROBE - LED (SURFACE MOUNTED)

PART	PART		PRICE EACH	
NUMBER	DESCRIPTION	BODY APPLICATION	LOOSE	INSTALLED
230748	Amber Strobe LED (Surface Mounted) Light kit - For installation to: Service Body rear end panels	All CST Bodies.	\$108	\$168
230749	Amber Strobe LED (Surface Mounted) Light kit - For installation to: Bumper riser surface	All CST Bumpers.	\$108	\$168

[•]All Amber Strobe LED Light Kits include 2 surface-mount lights

[•]Combo S/T/T Light with Back-up Light are oval in shape (Surface Mounted), and Clearance Lights are 0.75" Dia. in size.

[•]Wiring harness has a STAHL plug as standard, so an Adapter Plug is required for your specific Chassis Application.

[•]Over 80" wide bodies have front clearance light holes punched as standard.

[•]Installation instructions provided for the noted STAHL Challenger CST Body (Rear End Panel) application, or a STAHL Challenger CST Bumper (Riser surface area) applications (as listed above).

[•]Note: All lights within this LED Light Kit are LED.

[•]Note: Specify on orders that LED Light Kit (Surface Mounted) is to be loose or installed and specify to Body, or Bumper.

[•]This strobe light kit is designed to work with standard surface mounted light kits

[•]Installation instructions provided for the noted STAHL Challenger CST Body (Rear End Panel) application, or a STAHL Challenger CST Bumper (Riser surface area) applications (as listed above).

[•]Note: Specify on orders the Strobe Light Kit (Surface Mounted) is to be loose or installed and specify to Body, or Bumper.



Distributor Price List Effective: January 1, 2021

LINER (SPRAY-ON) TEXTURED

PART NUMBER	DESCRIPTION	BODY APPLICATION	PRICE EACH
222832	Textured (Black Only) Spray-on Liner for Load-Space floor only	CST82-48.5 Challenger ST II Body	\$533
222832	Textured (Black Only) Spray-on Liner for Load-Space floor only	CST98-48.5 & CST98-52.5 Challenger ST II Bodies	\$553
222832	Textured (Black Only) Spray-on Liner for Load-Space floor only	CST110-48.5 & CST110-52.5 Challenger ST II Bodies	\$568
222832	Textured (Black Only) Spray-on Liner for Load-Space floor only	CST134-48.5 & CST134-52.5 Challenger ST II Bodies	\$707
222832	Textured (Black Only) Spray-on Liner for Load-Space Floor, both Side Walls, Bulkhead, and Tailgate inside surface	CST82-48.5 Challenger ST II Body	\$789
222832	Textured (Black Only) Spray-on Liner for Load-Space Floor, both Side Walls, Bulkhead, and Tailgate inside surface	CST98-48.5 & CST98-52.5 Challenger ST II Bodies	\$833
222832	Textured (Black Only) Spray-on Liner for Load-Space Floor, both Side Walls, Bulkhead, and Tailgate inside surface	CST110-48.5 & CST110-52.5 Challenger ST II Bodies	\$860
222832	Textured (Black Only) Spray-on Liner for Load-Space Floor, both Side Walls, Bulkhead, and Tailgate inside surface	CST134-48.5 & CST134-52.5 Challenger ST II Bodies	\$1,033
222832	Textured (Black Only) Spray-on Liner for Load-Space Floor, both Side Walls, Bulkhead, Tailgate inside surface, and Compartment Top Both Sides	CST82-48.5 Challenger ST II Body	\$877
222832	Textured (Black Only) Spray-on Liner for Load-Space Floor, both Side Walls, Bulkhead, Tailgate inside surface, and Compartment Top Both Sides	CST98-48.5 & CST98-52.5 Challenger ST II Bodies	\$954
222832	Textured (Black Only) Spray-on Liner for Load-Space Floor, both Side Walls, Bulkhead, Tailgate inside surface, and Compartment Top Both Sides	CST110-48.5 & CST110-52.5 Challenger ST II Bodies	\$988
222832	Textured (Black Only) Spray-on Liner for Load-Space Floor, both Side Walls, Bulkhead, Tailgate inside surface, and Compartment Top Both Sides	CST134-48.5 & CST134-52.5 Challenger ST II Bodies	\$1,192
222832	Textured (Black Only) Spray-on Liner for Compartment Top only - both sides	CST82-48.5 Challenger ST II Body	\$496
222832	Textured (Black Only) Spray-on Liner for Compartment Top only - both sides	CST98-48.5 & CST98-52.5 Challenger ST II Bodies	\$530
222832	Textured (Black Only) Spray-on Liner for Compartment Top only - both sides	CST110-48.5 & CST110-52.5 Challenger ST II Bodies	\$539
222832	Textured (Black Only) Spray-on Liner for Compartment Top only - both sides	CST134-48.5 & CST134-52.5 Challenger ST II Bodies	\$670

[•]Note: Above Textured Spray-on Liner Options are not be used together...
•Call your Inside Sales Representative for Pricing for Textured Spray-on Liner Option needs if not listed...

[•]Textured Spray-on Liner #222832 (Universal Black) is the ONLY color STAHL plans on offering...

[•]Specify Liner application requirement at time of call...

[•]Please note that added options / features can impact the pricing for the Textured, so convey this information at time of call...



Distributor Price List Effective: January 1, 2021

LINER (SPRAY-ON) UL1000

PART NUMBER	DESCRIPTION	BODY APPLICATION	PRICE EACH
200585	UL1000 (Black, or White) Spray-on Liner for Load-Space floor only	CST82-48.5 Challenger ST II Body	\$459
200585	UL1000 (Black, or White) Spray-on Liner for Load-Space floor only	CST98-48.5 & CST98-52.5 Challenger ST II Bodies	\$479
200585	UL1000 (Black, or White) Spray-on Liner for Load-Space floor only	CST110-48.5 & CST110-52.5 Challenger ST II Bodies	\$492
200585	UL1000 (Black, or White) Spray-on Liner for Load-Space floor only	CST134-48.5 & CST134-52.5 Challenger ST II Bodies	\$611
200585	UL1000 (Black, or White) Spray-on Liner for Load-Space Floor, both Side Walls, Bulkhead, and Tailgate inside surface	CST82-48.5 Challenger ST II Body	\$683
200585	UL1000 (Black, or White) Spray-on Liner for Load-Space Floor, both Side Walls, Bulkhead, and Tailgate inside surface	CST98-48.5 & CST98-52.5 Challenger ST II Bodies	\$721
200585	UL1000 (Black, or White) Spray-on Liner for Load-Space Floor, both Side Walls, Bulkhead, and Tailgate inside surface	CST110-48.5 & CST110-52.5 Challenger ST II Bodies	\$745
200585	UL1000 (Black, or White) Spray-on Liner for Load-Space Floor, both Side Walls, Bulkhead, and Tailgate inside surface	CST134-48.5 & CST134-52.5 Challenger ST II Bodies	\$894
200585	UL1000 (Black, or White) Spray-on Liner for Load-Space Floor, both Side Walls, Bulkhead, Tailgate inside surface, and Compartment Top Both Sides	CST82-48.5 Challenger ST II Body	\$758
200585	UL1000 (Black, or White) Spray-on Liner for Load-Space Floor, both Side Walls, Bulkhead, Tailgate inside surface, and Compartment Top Both Sides	CST98-48.5 & CST98-52.5 Challenger ST II Bodies	\$825
200585	UL1000 (Black, or White) Spray-on Liner for Load-Space Floor, both Side Walls, Bulkhead, Tailgate inside surface, and Compartment Top Both Sides	CST110-48.5 & CST110-52.5 Challenger ST II Bodies	\$855
200585	UL1000 (Black, or White) Spray-on Liner for Load-Space Floor, both Side Walls, Bulkhead, Tailgate inside surface, and Compartment Top Both Sides	CST134-48.5 & CST134-52.5 Challenger ST II Bodies	\$1,031
200585	UL1000 (Black, or White) Spray-on Liner for Compartment Top only - both sides	CST82-48.5 Challenger ST II Body	\$427
200585	UL1000 (Black, or White) Spray-on Liner for Compartment Top only - both sides	CST98-48.5 & CST98-52.5 Challenger ST II Bodies	\$458
200585	UL1000 (Black, or White) Spray-on Liner for Compartment Top only - both sides	CST110-48.5 & CST110-52.5 Challenger ST II Bodies	\$467
200585	UL1000 (Black, or White) Spray-on Liner for Compartment Top only - both sides	CST134-48.5 & CST134-52.5 Challenger ST II Bodies	\$579

[•]Note: Above UL1000 Spray-on Liner Options are not be used together...

LOUVERS

PART		PRICE	EACH
NUMBER	DESCRIPTION	LOOSE	INSTALLED*
233361	Louver for venting body panel (6.25" x 6.25" x 16 gauge) w/(4) 4" louvers, bolts & nuts	\$34	N/A
233362	Louver for venting body panel (6.25" x 6.25" x 16 gauge) w/(4) 4" louvers, huck bolts	N/A	\$100

^{*}Location must be specified at time of order.

[•]Call your Inside Sales Representative for Pricing for UL1000 Spray-on Liner Option needs if not listed...

[•]UL1000 Spray-on Liner #200585 (Universal Black, or White) *Specify at time of order...

[•]UL1000 Spray-on Liner (#214609) "Colors" are available, if needed then Please Call for Pricing...

[•]Specify Liner Color needed and application requirement at time of call...

[•]UL1000 will dry down to provide a 10-12 mil thickness...

[•]Please note that added options / features can impact the pricing for the UL1000, so convey this information at time of call...

[•]Note: Louver option (if installed) requires body to be modified, this option must be order with the Body at the same time.



Distributor Price List Effective: January 1, 2021

LOW SLIDING ROOF (Bolt-on)

PART	-			PRIC	E EACH
NUMBER	DESCRIPTION	APPLICATION	WEIGHT	LOOSE	INSTALLED
232881	Two-Section Low Sliding Roof	CST82 std. ht. bodies with 48.5" floors, slam-action tailgate	216#	\$1,487	\$1,803
232798	Two-Section Low Sliding Roof	CST98 std. ht. bodies with 48.5" floors, slam-action tailgate	221#	\$1,487	\$1,803
232870	Two-Section Low Sliding Roof	CST98 low boy bodies with 48.5" floors, slam-action tailgate	216#	\$1,577	\$1,910
232871	Two-Section Low Sliding Roof	CST98 std. ht. bodies with 52.5" floors, slam-action tailgate	232#	\$1,611	\$1,929
232873	Two-Section Low Sliding Roof	CST110 std. ht. bodies with 48.5" floors, slam-action tailgate	240#	\$1,626	\$1,945
232875	Two-Section Low Sliding Roof	CST110 std. ht. bodies with 52.5" floors, slam-action tailgate	256#	\$1,754	\$2,069
232879	Two-Section Low Sliding Roof	CST134 std. ht. bodies with 52.5" floors, slam-action tailgate	301#	\$2,379	\$2,885
CRATE	Crate for low sliding	g roofs shipped loose (one required)		\$604	N/A

[•]Low Sliding Roof Features and Specifications:

[•]Powder Coated #200478 (Universal White) is Standard for this Option and included within the price.

^{•14} gauge galvanneal rear flap.

^{•16} gauge galvanneal roof front section, and rear section.

[•]Steel rollers on track

[•]Rear section slides under front section when low sliding roof is open.

[•]Positive close and hold-open locking mechanism.

[•]Rear Flap - two point slam-locking, removable and features locking rotary latch .

[•]A low sliding roof can be field mounted by matching drilling holes and bolting the roof to the body.

[•]A low sliding roof is weather resistant, but not waterproof.

[•]Note: A Crane Reinforcement / Low Sliding Roof combination is NO LONGER AVAILABLE due to interference between the Crane and Low Sliding Roof.



Distributor Price List Effective: January 1, 2021

MOUNTING KITS - Supplemental body mounting

PART CHASSIS			PRIC	E EACH
NUMBER	MODEL	APPLICATION	LOOSE	INSTALLED
208481	GM	2001-Current GM 3500 mounting kit for 60" and 84" cab-to-axle cab chassis applications. Required when ordering, or mounting a CST Body for a GM Cab Chassis.	\$149	n/a
235031	GM/ International	2019-Current GM MD / International CV (4500, 5500 chassis) mounting kit for 60" and 84" cab-to-axle cab chassis applications (Orderd with a new body) Note: standard CST mounting bracket kit #153695-100 to be deleted on order.	n/c	n/c
184502-60CA	RAM	2006-Current RAM mounting kit for 60" cab-to-axle cab chassis applications. Required when ordering, or mounting a CST Body for a RAM Cab Chassis.	\$98	n/a
184502-84CA	RAM	2006-Current RAM mounting kit for 84" cab-to-axle cab chassis applications. Required when ordering, or mounting a CST Body for a RAM Cab Chassis.	\$98	n/a
228813	Ford	2017-Current Ford mounting kit for 60" and 84" cab-to-axle cab chassis applications. Required when ordering, building, or mounting a CST Body for a FordCab Chassis.	\$118	n/a

MOUNTING KITS - Supplemental fuel fill

PART	CHASSIS		PRIC	E EACH
NUMBER	MODEL	APPLICATION	LOOSE	INSTALLED
152854	RAM	2003-2006 Pickup box removal fuel fill kit - gas	\$238	n/a
215894	RAM	2007-2011 Pickup box removal fuel fill kit - gas	\$290	n/a
213313	RAM	2012-Current Pickup box removal fuel fill kit - gas	\$777	n/a
152855	RAM	2003-2013 Pickup box removal fuel fill kit - diesel	\$701	n/a
224595	RAM	2014-Current Pickup box removal fuel fill kit - diesel "due to Cap-Less System"	\$880	\$1,011
149248	GM	2001-2003 Pickup box removal fuel fill kit - diesel	\$366	n/a
157521	GM	2004-2010 Pickup box removal fuel fill kit - gas	\$217	n/a
164236	GM	2004-2010 Pickup box removal fuel fill kit - diesel	\$337	n/a
158172-G	GM	2004-2010 Cab Chassis (60" & 84" CA) fuel fill kit - gas	\$66	n/a
158172-D	GM	2004-2010 Cab Chassis (60" & 84" CA) fuel fill kit - diesel	\$158	n/a
206860	GM	2011-2013 Pickup box removal fuel fill kit - gas	\$533	n/a
206861	GM	2011-2013 Pickup box removal fuel fill kit - diesel	\$557	n/a
233473	GM	2014-2019 Pickup box removal fuel fill kit - gas (includes fuel fill cap)	\$556	n/a
233472	GM	2014-2019 Pickup box removal fuel fill kit - diesel (includes fuel fill cap)	\$513	n/a
235326	GM	2020-Current Pickup box removal fuel fill kit - gas (includes fuel fill cap)	\$410	n/a
235331	GM	2020-Current Pickup box removal fuel fill kit - diesel (includes fuel fill cap)	TBD	n/a
206863	GM	2011-Current Cab Chassis (60" & 84" CA) fuel fill kit - gas	\$207	n/a
206862	GM	2011-Current Cab Chassis (60" & 84"CA) fuel fill kit - diesel	\$209	n/a
137610	Ford	1999-2004 Pickup box removal hose kit - gas (Ref #1C3Z9B149-FA)	\$916	n/a
137610	Ford	1999-2010 Pickup box removal hose kit - diesel (Ref #1C3Z9B149-EA)	\$916	n/a
183160	Ford	2005-2010 Ford Pick-up box removal and/or box delete hose kit - 56"CA - gas	\$174	n/a
206945	Ford	2011-2016 Pickup box removal fuel fill kit - gas	\$644	n/a
206946	Ford	2011-2016 Pickup box removal fuel fill kit - diesel	\$677	n/a
229676	Ford	2017-Current Pickup box removal fuel fill kit - gas	\$299	n/a
229677	Ford	2017-Current Pickup box removal fuel fill kit - diesel	\$277	n/a

[•]Fuel fill (#183160) works on 2005-2010 Ford Pickup box removal and pick-up delete applications, not Cab chassis applications.

OFF-ROAD MOUNTING KIT - Spring Mount

PART			PRICE EACH
NUMBER	DESCRIPTION	APPLICATION	LOOSE
184173	Off-road mounting kit	All 98" bodies (56"CA) - (2006 - 2016) Ford (4-point Mounting), and 82" bodies (40"CA) - (2006 - 2016) Ford (4-point Mounting)	\$209
229344	Off-road mounting kit	All 98" bodies (56"CA) - (2017 - Current) Ford (4-point Mounting), and 82" bodies (40"CA) - (2017 - Current) Ford (4-point Mounting)	\$209
171630	Off-road mounting kit	All 98" bodies (56"CA) - RAM, Chevy & GM (6-point Mounting), 82" bodies (37"CA) - RAM, & 82" bodies (42"CA) Chevy & GM (6-point Mounting)	\$252
189546-60CA	Off-road mounting kit	All 110" bodies - (2008-Current) RAM (60"CA Cab Chassis), and All 110" bodies - (2017-Current) Ford (60"CA Cab Chassis)	\$101
189546-84CA	Off-road mounting kit	All 134" bodies - (2008-Current) RAM (84"CA Cab Chassis), and All 134" bodies - (2017-Current) Ford (84"CA Cab Chassis)	\$185
209578	Off-road mounting kit	All 110" and 134" bodies - Chevy & GM (Cab Chassis)	\$252
182896	Off-road mounting kit	All 110" and 134" bodies - (2008-2016) Ford (60"CA & 84"CA Cab Chassis)	\$252

[•]Off-road mounting kits are required for bodies to be used on uneven or unpaved terrain or with aerial devices.

[•]GM cab chassis applications do NOT apply to C4500 and larger applications.

[•]No 2005-2010 Ford diesel hose kit available for Pick-up box removal and/or box delete applications.

[•]Off-road mounting kits (#189546-60CA & -84CA) are designed to work with (#184502) RAM Supplemental mounting kit, or (#228813) Ford Supplemental mounting kit.



Distributor Price List Effective: January 1, 2021

PAINT (WET) / POWDER COAT / IN PRIME PAINT (WET)

PART NUMBER	PAINT TYPE	BODY TYPE / APPLICATION	PRICE EACH FINISH PAINT (Wet)
128922	Acrylic Urethane (White)	82" / 98" Challenger ST II	\$780
128922	Acrylic Urethane (White)	Headache Rack	\$108
128922	Acrylic Urethane (White)	Low sliding roof	\$335
128922	Acrylic Urethane (White)	Highroof (exterior)	\$445
128922	Acrylic Urethane (White)	Highroof (interior load-space)	\$745
128922	Acrylic Urethane (White)	Compartment interiors	\$633
128922	Acrylic Urethane (White)	110" Challenger ST II	\$868
128922	Acrylic Urethane (White)	Headache Rack	\$108
128922	Acrylic Urethane (White)	Low sliding roof	\$357
128922	Acrylic Urethane (White)	Highroof (exterior)	\$499
128922	Acrylic Urethane (White)	Highroof (interior load-space)	\$789
128922	Acrylic Urethane (White)	Compartment interiors	\$700
128922	Acrylic Urethane (White)	134" Challenger ST II	\$1,067
128922	Acrylic Urethane (White)	Headache Rack	\$108
128922	Acrylic Urethane (White)	Low sliding roof	\$445
128922	Acrylic Urethane (White)	Highroof (exterior)	\$556
128922	Acrylic Urethane (White)	Highroof (interior load-space)	\$897
128922	Acrylic Urethane (White)	Compartment interiors	\$789
128923	Basecoat/Clearcoat (Colors)	82" / 98" Challenger ST II	\$1,472
128923	Basecoat/Clearcoat (Colors)	Headache Rack	\$215
128923	Basecoat/Clearcoat (Colors)	Low sliding roof	\$560
128923	Basecoat/Clearcoat (Colors)	Highroof (exterior)	\$734
128923	Basecoat/Clearcoat (Colors)	Highroof (interior load-space)	\$1,200
128923	Basecoat/Clearcoat (Colors)	Compartment interiors	\$1,072
128923	Basecoat/Clearcoat (Colors)	110" Challenger ST II	\$1,705
128923	Basecoat/Clearcoat (Colors)	Headache Rack	\$215
128923	Basecoat/Clearcoat (Colors)	Low sliding roof	\$597
128923	Basecoat/Clearcoat (Colors)	Highroof (exterior)	\$819
128923	Basecoat/Clearcoat (Colors)	Highroof (interior load-space)	\$1,270
128923	Basecoat/Clearcoat (Colors)	Compartment interiors	\$1,131
128923	Basecoat/Clearcoat (Colors)	134" Challenger ST II	\$2,257
128923	Basecoat/Clearcoat (Colors)	Headache Rack	\$215
128923	Basecoat/Clearcoat (Colors)	Low sliding roof	\$734
128923	Basecoat/Clearcoat (Colors)	Highroof (exterior)	\$904
128923	Basecoat/Clearcoat (Colors)	Highroof (interior load-space)	\$1,437
128923	Basecoat/Clearcoat (Colors)	Compartment interiors	\$1,270

[•]Specify Painted (Wet): Acrylic Urethane (White), or Basecoat/Clearcoat (Color) at time of order...

[•]Specify Paint Code and Color for Paint (Wet) at time of order...

[•]Note: Powder Coat #200478 (Universal White) is standard for the Challenger ST II Bodies & Options, unless an option notes otherwise...

^{*}Specify on All Orders (Bodies, as well as Options) if they are to be Powder Coat, Finish Paint (Wet), or In Prime to avoid any confusion...

[•]Note: As standard if someone wants Basecoat / Clearcoat (Color) options, then STAHL will apply that over a standard Powder coated unit. If customer wants this applied over a unit in prime, then you must also select option "In Prime", ILO Powder Coat...

[•]Note: If body and/or options are to be finish painted #128922 acrylic urethane white, ILO powder coat #200478 (Universal White). You must also select option "In Prime", ILO Powder Coat...

[•]Note: Metallic Colors / Finish Paints are to be priced using Basecoat/Clearcoat (Color)...

[•]Note: Tri-Coat Paint (or Pearl) is NOT available from STAHL as a Finish Paint Option...



Distributor Price List Effective: January 1, 2021

PAINT (WET) / POWDER COAT / IN PRIME POWDER COAT (Standard for All CST Bodies and Options)

PART NUMBER	PAINT TYPE	BODY TYPE / APPLICATION	PRICE EACH POWDER COAT**
200478	Powder Coat (Universal White)	82" / 98" Challenger ST II	In Body Price
200478	Powder Coat (Universal White)	110" Challenger ST II	In Body Price
200478	Powder Coat (Universal White)	134" Challenger ST II	In Body Price

^{**}Specify Powder Coat (Universal White) at time of order...

IN PRIME (WHITE) ILO POWDER COAT (UNIVERSAL WHITE)

PART	-	-	PRICE EACH
NUMBER	PRIMER TYPE	BODY TYPE / APPLICATION	IN PRIME
928051	Urethane Primer (White)	82" / 98" Challenger ST II	(\$267)
928051	Urethane Primer (White)	Low sliding roof	(\$114)
928051	Urethane Primer (White)	Highroof	(\$153)
928051	Urethane Primer (White)	110" Challenger ST II	(\$313)
928051	Urethane Primer (White)	Low sliding roof	(\$123)
928051	Urethane Primer (White)	Highroof	(\$169)
928051	Urethane Primer (White)	134" Challenger ST II	(\$357)
928051	Urethane Primer (White)	Low sliding roof	(\$152)
928051	Urethane Primer (White)	Highroof	(\$192)

^{*}Specify Painted (Wet): Acrylic Urethane (White), or Basecoat/Clearcoat (Color) at time of order...

[•]Powder Coat #200478 (Universal White) is standard for STAHL products, unless an option notes otherwise...

[•]Note: Powder Coat #200478 (Universal White) is standard for the Challenger ST II Bodies & Options, unless an option notes otherwise...

^{*}Specify on All Orders (Bodies, as well as Options) if they are to be Powder Coat, Finish Paint (Wet), or In Prime to avoid any confusion...

[•]Specify Paint Code and Color for Paint (Wet) at time of order...

[•]Note: Powder Coat #200478 (Universal White) is standard for the Challenger ST II Bodies & Options, unless an option notes otherwise...

^{*}Specify on All Orders (Bodies, as well as Options) if they are to be Powder Coat, Finish Paint (Wet), or In Prime to avoid any confusion...

[•]Note: Options that are NOT listed above (In Prime, ILO Powder Coat) that are powder coated as standard will NOT receive and additional deduct...

[•]Note: As standard if someone wants Basecoat/Clearcoat (Color) option, then STAHL will apply that over a standard Powder Coated unit. If customer wants this applied over a unit In Prime, then you must also select option "In Prime", ILO Powder Coat...

[•]Note: If body and/or options are to be finish painted #128922 acrylic urethane white, ILO powder coat #200478 (Universal White). You must also select option "In Prime", ILO Powder Coat...



Distributor Price List Effective: January 1, 2021

PIPE CARRIER / PIPE SUPPORT / PIPE VISE BRACKET (Bolt-on)

PART		PRICE EACH	
NUMBER	DESCRIPTION	LOOSE	INSTALLED *
4149	Pipe carrier for compartment top mount	\$175	\$232
446	Pipe support assembly with F bar for compartment front end panel	\$72	\$126
234960	Pipe vise bracket assembly (Bolt-on) for mounting on bumper riser or rear end panel (Designed to be used with #446)	\$122	\$160

^{*}Location must be specified at time of order if ordered installed.

POWER DOOR LOCKS

PART		PRICE EACH	
NUMBER	DESCRIPTION	LOOSE	INSTALLED
200333	CST82, CST98, CST110 (VV & VVL) Power door lock kit (six door actuators) - (for 6 Side Compartment Doors)	\$664	\$856
200353	CST134 (VV & VVL) Power door lock kit (eight door actuators) - (for 8 Side Compartment Doors)	\$883	\$1,139
200355	CST "Highroof Rear Door Only" Power door lock kit (one door actuator) - (can be added to Non-Highroof Power Door Lock Kit when Highroof Option is specified)	\$111	\$142
235176	CST "C Side Compartment Door and/or Highroof Side Access Door" Power door lock kit (one actuator per door) to be added to standard Power Door Lock Kits	\$111	\$142
233458	2017-current Ford F-Series only. Supply an interface module and harness, so the STAHL Power Door Lock System for a CST II will function using the OEM Chassis Key FOB, ILO the Stahl FOB supplied as part of the PDL Kit Noting that otherwise the locking systems on the chassis and service body would work independently. Must be ordered w/Power Door Lock Option (Loose, or Installed)	\$191	\$295

[•]Kit price includes actuators, keyless entry, and wiring harness.

STONE GUARDS (ALUMINUM TREADBRITE)

PART			PRICE PAIR	
NUMBER	DESCRIPTION	BODY APPLICATION	LOOSE	INSTALLED
220618	Aluminum Tread-Brite Front Stone Guards (1) Pair	For Narrow Compartment Bodie (S)	\$127	\$132
220644	Aluminum Tread-Brite Front Stone Guards (1) Pair	For Deep Compartment Bodie (D)	\$127	\$132

[•]Size: 10" high x 9.63" wide on SRW, and 10" high x 15.63" wide on DRW.

[•]Finish paint (Black) is the standard for options listed above.

[•]For side compartment door application only (unless noted to include rear door, then a Highroof must be ordered as well).

[•]Power Door Lock options can be used on Top Pak Bodies, but Top Pak Lids are NOT provided with Power door locks.

[•] Note: Standard Power Door applications above are not designed for "C" Bodies, and/or Tank Compartment applications (unless noted for specific "CV" type application).

[•] Note: CST82 "C" Bodies will not allow for a Power Door Lock to be provided to the lower "C" door because the lower "C" compartment door is NOT large enough to allow for a Power Door Lock to be added... Please note that this is NOT AVAILABLE.



Distributor Price List Effective: January 1, 2021

TAILBOARD ASM (Bolt-On)

PART		PRICE EACH	
NUMBER	DESCRIPTION	LOOSE	INSTALLED
202037	Tailboard Asm (Bolt-On) Includes a 2"x6" Pine Tailboard and a pair of channel brackets for a Challenger ST II (48.5" application only)	n/a	\$112
207405	Tailboard Asm (Bolt-On) Includes a 2"x6" Pine Tailboard and a pair of channel brackets for a Challenger ST II (52.5" application only)	n/a	\$112

[•]Tailboard Asm includes: (1) Nominal 2"x6" Treated Pine Board, (2) 10-ga. galvanneal Bolt-on Channels Brackets, & Fasteners...

TAILGATE (Slam-Action) - DELETE

PART		PRICE EACH
NUMBER	DESCRIPTION	DEDUCT FROM BODY
182071	Delete standard slam-action tailgate from any Challenger ST II (48.5" application only)	\$118
184480	Delete standard slam-action tailgate from any Challenger ST II (52.5" application only)	\$118

•Note: When a Tailgate DELETE Option is ordered, then please note that TAILGATE HOLES are still provided within the Rear End Panels... See TAILGATE - DELETE & OMIT TAILGATE HOLES from REAR END PANEL KIT if you want the Tailgate holes to be removed...

TAILGATE (Slam-Action) - DELETE & OMIT TG HOLES from END PANEL

PART NUMBER	DESCRIPTION	PRICE EACH DEDUCT FROM BODY
214189	Delete standard slam-action tailgate & Omit Tailgate Holes from Rear End Panels for "VVS" or "VVST" Bodies with 48.5" wide Floor application (Without Light Holes)	\$115
215455	Delete standard slam-action tailgate & Omit Tailgate Holes from Rear End Panels for "VVSL" or "VVSLT" Bodies with 48.5" wide Floor application (Without Light Holes)	\$115
229074	Delete standard slam-action tailgate & Omit Tailgate Holes from Rear End Panels for "VVD" or "VVDT" Bodies with 48.5" wide Floor application (Without Light Holes)	\$115
212129	Delete standard slam-action tailgate & Omit Tailgate Holes from Rear End Panels for "VVD" or "VVDT" Bodies with 52.5" wide Floor application (Without Light Holes)	\$115
SPL	Delete standard slam-action tailgate & Omit Tailgate Holes from Rear End Panels for a CST Body, if a part number is not listed (Any Application, Body, Floor Width, Light Holes, Crane Reinforcement, etc)	\$115

[•]Note: When a TAILGATE - DELETE & OMIT TAILGATE HOLES from REAR END PANEL KIT Option is ordered, then the required Tailgate is DELETED and the Rear End Panels are replaced so NO TAILGATE HOLES are provided (ILO Rear End Panels with Tailgate holes)...

[•]Powder Coated #200478 (Universal White) is Standard for the Tailboard channel brackets and is included within the pricing.

[•]Note: The pine tailboard is supplied in raw, so no finish is included (as standard) with this option...

[•]Note: When a Tailboard Asm is selected, then the Tailgate DELETE Option is to be ordered as well. The Tailboard Asm uses the standard (Slam-action) tailgate holes... See TAILGATE (Slam-Action) - DELETE option to remove the standard tailgate...

[•]Note: A Tailboard Asm option is needed if your CST Body will include a STAHL Heavy-Duty Hydraulic Outrigger. The standard slam-action tailgate interferes with the hydraulic hoses, so this Tailboard Asm is required for this application...

[•]Note: Please contact your Inside Sales for your Special Quote / Pricing for any Non-Standard (or Non-Price Book) applications...

[•]Note: No Need to DELETE the specific TAILGATE from the order as a separate line item, and is removed as part of the TAILGATE - DELETE & OMIT TAILGATE HOLES from REAR END PANEL KIT Option...

^{*}You must take into consideration the Body, Light Holes, Tailgate width, and other options that impact Rear End Panels...

[•]Note: Consider items / options that impact the rear end panels...

[•]Note: Please note that Options like Crane Reinforcements & Rear Light Holes do impact the above Option application...

[•]Note: Additional Body feature that impact this options: "V", "VL", "C", "CL", "S", "D", Floor width (48.5" or 52.5"), & more...

[•]Note: This Option can not be used with a STOCK body, because of the OMIT TAILGATE HOLES from REAR END PANELS...

[•]Note: At time of printing "SPL" = Engineering Required, so lead-time would be longer than standard product.



Distributor Price List Effective: January 1, 2021

TANK COMPARTMENT - 60" High (Built into Body Design)

PART			PRICE EACH
NUMBER	DESCRIPTION	APPLICATION	INSTALLED
207382-02	60" tank compartment	CST98VS - Curbside	\$550
207382-01	60" tank compartment	CST98VS - Streetside	\$550
207062-02	60" tank compartment	CST98VD - Curbside	\$550
207062-01	60" tank compartment	CST98VD - Streetside	\$550
SPL	60" tank compartment	CST98 C-Side - Streetside	\$550
SPL	60" tank compartment	CST98 C-Side - Curbside	\$550
207336-02	60" tank compartment	CST110VS - Curbside	\$550
207336-01	60" tank compartment	CST110VS - Streetside	\$550
207024-02	60" tank compartment	CST110VD - Curbside	\$550
207024-01	60" tank compartment	CST110VD - Streetside	\$550
206367-02	60" tank compartment	CST134VD - Curbside	\$550
206367-01	60" tank compartment	CST134VD - Streetside	\$550
207328-02	60" tank compartment	CST98VD (NWB) - Curbside	\$550
207328-01	60" tank compartment	CST98VD (NWB) - Streetside	\$550
207054-02	60" tank compartment	CST110VD (NWB) - Curbside	\$550
207054-01	60" tank compartment	CST110VD (NWB) - Streetside	\$550
206914-02	60" tank compartment	CST134VD (NWB) - Curbside	\$550
206914-01	60" tank compartment	CST134VD (NWB) - Streetside	\$550

- •Powder Coated #200478 (Universal White) is Standard for this Option and included within the price.
- •Tank Compartments are built into the Body, so they are to be ordered with the Body at the same time...
- •Tank compartment on 39.5" high bodies extends 20.5" above the compartment top.
- •Tank compartments are offset in 2.46" from the load-space, above the compartment top of body.
- •As Standard No shelving designed to work within Tank compartment space located above the compartment top of body.
 - •No shelf attachment points located above compartment top of body, & shelving would need to be a non-standard depth...
- •Tank compartment will work with a low sliding roof.
- •Low Profile, Top Pak Bodies, and "C" Side type applications are available upon request and must be Special Quoted by Inside Sales.
- •Note: Pricing includes the deletion of any applicable trays from the required front compartment.
- •Customer to specify/confirm location at time of order.
- •Note that some standard options (like Bar Locks, Crane Reinforcement, Highroof, etc...) are not designed (as standard) to work with a Tank Compartment, so please contact Inside Sales to confirm application and Special Pricing. (As needed)
- •Highroof with Tank Compartment applications are available upon request and must be Special Quoted by Inside Sales.
- •Standard Tank Compartments are designed to work with "V" Side type applications.
 - •"VL", "C", "CL", "LT", and "T" Side type application require Engineering "SPL".

•Tank Compartment Specifications:

- •14 gauge galvanneal front end panel, tank compartment top, and load-space wall.
- •16 gauge galvanneal Intermediate panel.
- •Louvers for venting provided within both front end and intermediate tank compartment panels.
- •20 gauge double panel construction, (3) total hinges provided with this door, and standard latching.
- •60" high Tank Compartment provides a 60" Overall Compartment, with an approximate clear door opening of: 56 7/8".
- •3-Point (Stainless Steel) T-Handle Latch provided, ILO Std. (Single Point) Rotary Latches like other Std. height compartments.

TANK HOLDER (Bolt-on)

PART APPLICATION		PRICE EACH		
NUMBER	DESCRIPTION	(HOLDER WIDTH / COMPT WIDTH)	LOOSE*	INSTALLED*
208267	Tank holder for two tanks (9" dia. max)	CST98 FV Compartment. 25.69" Holder width / 29.81" wide compartment. Fits 14", or 20" deep compartments		\$208
208048	Tank holder for two tanks (9" dia. max)	CST110 & 134 FV Compartment. 29.38" Holder width / 33.44" wide compartment. Fits 14", or 20" deep compartments	\$126	\$208

[•]Powder Coated #200478 (Universal White) is Standard for this Option and included within the price.

Mounting fasteners are included for attaching within Tank Compartment (Nuts, bolts, & more type fasteners).

^{*}Location must be specified at time of order.



Distributor Price List Effective: January 1, 2021

TIE DOWN RING (SINGLE) KIT (Load-space)

PART		PRICE EACH	
NUMBER	DESCRIPTION	LOOSE	INSTALLED *
225414	Tie down "D" ring (recessed) - 2000# Capacity (Single) Kit with fasteners	\$41	\$77

^{*}Location must be specified at time of order.

TIE DOWN RING FLOOR KIT - SET OF (4) Four (In Floor)

	TANGI EGGIT AT - GET GT (4)	1 0 011 (111 1 1 0 0 1)	DDIOE	(DED CET)
PART				(PER SET)
NUMBER	DESCRIPTION	APPLICATION	LOOSE	INSTALLED *
005575	Tie-Down Ring Floor Kit - "D" Ring (recessed) - 2000#	for a CST82-48.5 Challenger ST II	1-	#200
225575	Capacity - Set of (4) Four (In Floor)	Body - with NO Wheel Boxes	n/a	\$308.00
223408	Tie-Down Ring Floor Kit - "D" Ring (recessed) - 2000#	for a CST98-48.5 Challenger ST II	n/o	\$308.00
223408	Capacity - Set of (4) Four (In Floor)	Body - with NO Wheel Boxes	n/a	\$306.00
225551	Tie-Down Ring Floor Kit - "D" Ring (recessed) - 2000#	for a CST98-52.5 Challenger ST II	n/a	\$308.00
225551	Capacity - Set of (4) Four (In Floor)	Body - with Wheel Boxes	II/a	\$306.00
225552	Tie-Down Ring Floor Kit - "D" Ring (recessed) - 2000#	for a CST98-52.5 Challenger ST II	n/a	\$308.00
223332	Capacity - Set of (4) Four (In Floor)	Body - with NO Wheel Boxes		
225554	Tie-Down Ring Floor Kit - "D" Ring (recessed) - 2000#	for a CST110-48.5 Challenger ST II	n/a	\$308.00
223334	Capacity - Set of (4) Four (In Floor)	Body - with Wheel Boxes	II/a	
225511	Tie-Down Ring Floor Kit - "D" Ring (recessed) - 2000#	for a CST110-48.5 Challenger ST II	n/a	\$308.00
223311	Capacity - Set of (4) Four (In Floor)	Body - with NO Wheel Boxes	II/a	
225514	Tie-Down Ring Floor Kit - "D" Ring (recessed) - 2000#	for a CST110-52.5 Challenger ST II	n/a	\$308.00
223314	Capacity - Set of (4) Four (In Floor)	Body - with Wheel Boxes	II/a	φ306.00
217710	Tie-Down Ring Floor Kit - "D" Ring (recessed) - 2000#	for a CST110-52.5 Challenger ST II	n/a	\$308.00
217710	Capacity - Set of (4) Four (In Floor)	Body - with NO Wheel Boxes	II/a	φ300.00
225518	Tie-Down Ring Floor Kit - "D" Ring (recessed) - 2000#	for a CST134-48.5 Challenger ST II	n/a	\$308.00
223316	Capacity - Set of (4) Four (In Floor)	Body - with Wheel Boxes	II/a	φ300.00
225515	Tie-Down Ring Floor Kit - "D" Ring (recessed) - 2000#	for a CST134-52.5 Challenger ST II	n/o	\$308.00
220010	Capacity - Set of (4) Four (In Floor)	Body - with Wheel Boxes	n/a	φ300.00
225573	Tie-Down Ring Floor Kit - "D" Ring (recessed) - 2000#	for a CST134-52.5 Challenger ST II	n/o	\$308.00
220073	Capacity - Set of (4) Four (In Floor)	Body - with NO Wheel Boxes	n/a	

[•]Standard locations for the above Set of (4) Four Tie Down Rings (In Floor) are defined as the following:

[•]Tie down rings can be installed in the load space floor or load space inside centers.

[•]Note: Order to reflect "#SPL" so floor plate can be pre-punched for requried tie-down ring kit needs (as needed)...

[•]Tie down rings are located 3-1/2" from the load-space inner walls (both sides).

[•]On a CST Body: Front & Rear Tie down rings located 6" from each end of floor plate.

[•]Note: Above kits remove standard floor, and adds required floor plate with pre-punched holes for required tie-down ring kit...

[•]Note: Above kits are specifc to bodies with or without "Wheel Boxes"...



Distributor Price List Effective: January 1, 2021

TIE DOWN RING FLOOR KIT - SET OF (6) Six (In Floor)

PART			PRICE	(PER SET)
NUMBER	DESCRIPTION	APPLICATION	LOOSE	INSTALLED *
225576	Tie-Down Ring Floor Kit - "D" Ring (recessed) - 2000# Capacity - Set of (6) Six (In Floor)	for a CST82-48.5 Challenger ST II Body - with NO Wheel Boxes	n/a	\$460
214941	Tie-Down Ring Floor Kit - "D" Ring (recessed) - 2000# Capacity - Set of (6) Six (In Floor)	for a CST98-48.5 Challenger ST II Body - with NO Wheel Boxes	n/a	\$460
210969	Tie-Down Ring Floor Kit - "D" Ring (recessed) - 2000# Capacity - Set of (6) Six (In Floor)	for a CST98-52.5 Challenger ST II Body - with Wheel Boxes	n/a	\$460
225553	Tie-Down Ring Floor Kit - "D" Ring (recessed) - 2000# Capacity - Set of (6) Six (In Floor)	for a CST98-52.5 Challenger ST II Body - with NO Wheel Boxes	n/a	\$460
225555	Tie-Down Ring Floor Kit - "D" Ring (recessed) - 2000# Capacity - Set of (6) Six (In Floor)	for a CST110-48.5 Challenger ST II Body - with Wheel Boxes	n/a	\$460
225512	Tie-Down Ring Floor Kit - "D" Ring (recessed) - 2000# Capacity - Set of (6) Six (In Floor)	for a CST110-48.5 Challenger ST II Body - with NO Wheel Boxes	n/a	\$460
225513	Tie-Down Ring Floor Kit - "D" Ring (recessed) - 2000# Capacity - Set of (6) Six (In Floor)	for a CST110-52.5 Challenger ST II Body - with Wheel Boxes	n/a	\$460
225550	Tie-Down Ring Floor Kit - "D" Ring (recessed) - 2000# Capacity - Set of (6) Six (In Floor)	for a CST110-52.5 Challenger ST II Body - with NO Wheel Boxes	n/a	\$460
225517	Tie-Down Ring Floor Kit - "D" Ring (recessed) - 2000# Capacity - Set of (6) Six (In Floor)	for a CST134-48.5 Challenger ST II Body - with Wheel Boxes	n/a	\$460
225516	Tie-Down Ring Floor Kit - "D" Ring (recessed) - 2000# Capacity - Set of (6) Six (In Floor)	for a CST134-52.5 Challenger ST II Body - with Wheel Boxes	n/a	\$460
225574	Tie-Down Ring Floor Kit - "D" Ring (recessed) - 2000# Capacity - Set of (6) Six (In Floor)	for a CST134-52.5 Challenger ST II Body - with NO Wheel Boxes	n/a	\$460

[•]Standard locations for the above Set of (6) Six Tie Down Rings (In Floor) are defined as the following:

[•]Tie down rings are located 3-1/2" from the load-space inner walls (both sides).

[•]On a CST Body: Front & Rear Tie down rings located 6" from each end of floor plate.

[•]On a CST Body: Center (Pair) of Tie down rings are located at midpoint (centered front to rear). Valid Only on a "without" wheel boxes application.

[•]On a CST Body: Center (Pair) of Tie down rings are located 26.53" forward of the rear axle centerline (just in front of the wheel boxes). Valid Only on a "with" wheel boxes application.

[•]Note: Above kits remove standard floor, and adds required floor plate with pre-punched holes for requried tie-down ring kit...

[•]Note: Above kits are specifc to bodies with or without "Wheel Boxes"...



Distributor Price List Effective: January 1, 2021

TIRE CARRIERS (Bolt-on)

PART		PRIC	E EACH
NUMBER	DESCRIPTION	LOOSE	INSTALLED*
210653	Spare tire carrier - for interior load-space side wall application	\$77	\$160

^{*}Location must be specified at time of order if installed, as well as tire size noted...

TOP-PAKS - Add On (Bolt-on)

	,				
PART	APPLICATION	DIVIDERS	APPROX.	PRIC	E EACH
NUMBER	BODY LENGTH & COMPT. DEPTH	INCLUDED	WEIGHT	LOOSE	INSTALLED
212891	CST98" long x 14" deep body side	10	110#	\$1,383	\$1,402
210960	CST98" long x 20" deep body side	10	115#	\$1,444	\$1,505
213331	CST110" long x 14" deep body side	12	110#	\$1,444	\$1,505
211332	CST110" long x 20" deep body side	12	115#	\$1,505	\$1,564
210949	CST134" long x 20" deep body side (w/double lids)	14	150#	\$2,287	\$2,406

[•]Powder Coated #200478 (Universal White) is Standard for this Option and included within the price.

TOP PAK DIVIDERS

PART NUMBER	DESCRIPTION	COMPARTMENT DEPTH	SIZE	PRICE EACH LOOSE
215158	Dividers for Top Pak applications	14"	1.75" H x 12.96" L	\$3
215157	Dividers for Top Pak applications	20"	1.75" H x 18.96" L	\$3

[•]Dividers are 16 gauge steel G60 min spangle chem. dry

[•]Finish Painted direct to metal (Gloss Black) is standard for this option and is included within the price.

[•]Mounting fasteners are included for installation.

[•]Top-Paks are 3 3/4" deep.

[•]Top-Paks may be installed by either bolting or welding to the compartment top.

[•]Top-Paks may be used opposite a crane reinforcement (crane reinforcement curbside / add-on top-pak streetside).

[•]Top-Paks are provided with divider slots on 4" centers.

[•]Note: Current Add-On Top Paks are NOT designed (as standard) to work with a Low Sliding Roof option, so please contact Inside Sales to confirm application and Special Pricing. (As needed). Engineering may be required...

[•]Top Pak Dividers are for a Challenger ST II Top Pak Body application, and/or Add-on Top Pak Option application...



Distributor Price List Effective: January 1, 2021

TRAYS - With Dividers (Bolt-on) CST82 Bodies

PART		COMPARTMENT	COMPARTMENT	TRAY	TRAY	# OF DIVIDERS	PRICE EACH
NUMBER	BODY	LOCATION	DEPTH	WIDTH	DEPTH	PROVIDED	LOOSE / INSTALLED
213251	82"	Front Vertical	14"	9 5/16"	10 3/4"	2	\$96.00
206203	82"	Horizontal	14"	47 1/8"	10 3/4"	10	\$138.00
206209	82"	Rear Vertical	14"	17 3/8"	10 3/4"	4	\$96.00

CST98 Bodies

PART		COMPARTMENT	COMPARTMENT	TRAY	TRAY	# OF DIVIDERS	PRICE EACH	
NUMBER	BODY	LOCATION	DEPTH	WIDTH	DEPTH	PROVIDED	LOOSE / INSTALLED	
206204	98"	Front Vertical	14"	25 3/4"	10 3/4"	6	\$96.00	
206182	98"	Front Vertical	20"	25 3/4"	16 3/4"	6	\$96.00	
206203	98"	Horizontal	14"	47 1/8"	10 3/4"	10	\$138.00	
206190	98"	Horizontal	20"	47 1/8"	16 3/4"	10	\$138.00	
206237-01	98"	C-Side Horizontal, Streetside	14"	65"	10 3/4"	10	\$191.00	
206237-02	98"	C-Side Horizontal, Curbside	14"	65"	10 3/4"	10	\$191.00	
206205	98"	Rear Vertical	14"	16 55/64"	10 3/4"	4	\$96.00	
206188	98"	Rear Vertical	20"	16 55/64"	16 3/4"	4	\$96.00	

[•]Mounting fasteners are included for attaching to Challenger ST II Body (nuts and bolts fasteners).

[•]Trays for vertical compartments are adjustable on 1" increments

[•]Trays for horizontal compartments are adjustable on 1" increments, but limited on the long "C" horizontal due to the support bracket...

[•]Trays are provided with divider slots on 2" centers (dividers every other slot).

[•]Trays are provided with a 2.00" high front and rear lip, 5/8" deep formed edge to hold dividers into place.

[•]Tray ends to formed up with no rolled edge, providing the attachment points needed for bolting within a compartment...

[•]Tray price INCLUDES noted dividers supplied as standard (Std.: Dividers every other slot). Additional dividers are extra.

[•]Trays are made of 14 gauge hi-spangle galvanized steel.

[•]Dividers are 16 gauge steel G60 min spangle chem. dry

^{•250} pound maximum weight capacity per tray.

[•]The long "C" horizontal tray is supplied as standard with (1) single support bracket, w/bracket located near body end panel...

^{*}Standard support bracket mounting holes are 7.00" centerline to centerline, limiting adjustment on a long "C" horizontal tray...

[•]If more than one "C" horizontal tray within a compartment, then support bracket to be replaced w/bracket to handle specific needs...

[•]Support brackets: #206072 (14"D compartment depth), & #206111 (20"D compartment depth) for a long "C" horizontal tray ...

[•]Engineering is then Required...

[•]Note: At time of printing "SPL" = Engineering Required, so lead-time would be longer than standard product.



Distributor Price List Effective: January 1, 2021

TRAYS - With Dividers (Bolt-on) CST110 Bodies

PART NUMBER	BODY	COMPARTMENT LOCATION	COMPARTMENT DEPTH	TRAY WIDTH	TRAY DEPTH	# OF DIVIDERS PROVIDED	PRICE EACH LOOSE
206207	110"	Front Vertical	14"	29 3/8"	10 3/4"	6	\$96
206184	110"	Front Vertical	20"	29 3/8"	16 3/4"	6	\$96
206203	110"	Horizontal	14"	47 1/8"	10 3/4"	10	\$138
206190	110"	Horizontal	20"	47 1/8"	16 3/4"	10	\$138
206204	110"	Rear Vertical	14"	25 3/4"	10 3/4"	6	\$96
206182	110"	Rear Vertical	20"	25 3/4"	16 3/4"	6	\$96

CST134 Bodies

PART		COMPARTMENT	COMPARTMENT	TRAY	TRAY	# OF DIVIDERS	PRICE EACH
NUMBER	BODY	LOCATION	DEPTH	WIDTH	DEPTH	PROVIDED	LOOSE
206184	134"	Front Vertical	20"	29 3/8"	16 3/4"	6	\$96
206186	134"	Second Vertical	20"	20"	16 3/4"	4	\$96
206190	134"	Horizontal	20"	47 1/8"	16 3/4"	10	\$138
206182	134"	Rear Vertical	20"	25 3/4"	16 3/4"	6	\$96

[•]Mounting fasteners are included for attaching to Challenger ST II Body (nuts and bolts fasteners).

TRAYS - With Dividers (Bolt-on) - DELETE

•Note: To Delete a Tray with dividers from a compartment, take the Price to add a Tray and deduct that same amount...

TRAY DIVIDERS

 110.11 211122110							
PART		COMPARTMENT		PRICE EACH			
NUMBER	DESCRIPTION	DEPTH	SIZE	LOOSE			
214087	Dividers for Trays	14"	2.0" H x 10.50" L	\$3			
214088	Dividers for Trays	20"	2.0" H x 16.50" L	\$3			

[•]Dividers are 16 gauge steel G60 min spangle chem. dry

[•]Trays for vertical compartments are adjustable on 1" increments

[•]Trays for horizontal compartments are adjustable on 1" increments, but limited on the long "C" horizontal due to the support bracket...

[•]Trays are provided with divider slots on 2" centers (dividers every other slot).

[•]Trays are provided with a 2.00" high front and rear lip, 5/8" deep formed edge to hold dividers into place.

[•]Tray ends to formed up with no rolled edge, providing the attachment points needed for bolting within a compartment...

[•]Tray price INCLUDES noted dividers supplied as standard (Std.: Dividers every other slot). Additional dividers are extra.

[•]Trays are made of 14 gauge hi-spangle galvanized steel.

[•]Dividers are 16 gauge steel G60 min spangle chem. dry

^{•250} pound maximum weight capacity per tray.

[•]The long "C" horizontal tray is supplied as standard with (1) single support bracket, w/bracket located near body end panel...

^{*}Standard support bracket mounting holes are 7.00" centerline to centerline, limiting adjustment on a long "C" horizontal tray...

[•]If more than one "C" horizontal tray within a compartment, then support bracket to be replaced w/bracket to handle specific needs...

[•]Support brackets: #206072 (14"D compartment depth), & #206111 (20"D compartment depth) for a long "C" horizontal tray ...

[•]Engineering is then Required...



Distributor Price List Effective: January 1, 2021

WEST COAST CHALLENGER ST II (Aluminum) UPGRADE PACKAGE

PART NUMBER	DESCRIPTION	APPLICATION	PRICE EACH IN LIEU OF STANDARD INSTALLED
231131-98S	West Coast CST (for Top Pak Body) Aluminum Upgrade Package	CST98SLT / ST-48.5	\$699
231131-110S	West Coast CST (for Top Pak Body) Aluminum Upgrade Package	CST110SLT / ST-48.5	\$843
231131-110D-52	West Coast CST (for Top Pak Body) Aluminum Upgrade Package	CST110DLT / DT-52.5	\$843
INSTALL	Install (1 EA) tailgate tip protector, (2 EA) stone sheilds in lieu of loose	All West Coast Packages	\$69

[•]Note: The West Coast CST (Aluminum) Upgrade Package must be ordered along with a Challenger ST II body with built-in Top Paks.

WEST COAST - ALUMINUM TREADBRITE (DIAMOND PLATE) OVERLAY KITS

PART			PRICE	EACH
NUMBER	DESCRIPTION	APPLICATION	LOOSE	INSTALLED
231127-82S	West Coast CST (for Non-Top Pak Body) Aluminum Overlay Kit	CST82SL / S-48.5	\$401	\$522
231127-98S	West Coast CST (for Non-Top Pak Body) Aluminum Overlay Kit	CST98SL / S-48.5	\$401	\$522
231127-110S	West Coast CST (for Non-Top Pak Body) Aluminum Overlay Kit	CST110SL / S-48.5	\$417	\$538
231127-98D-52	West Coast CST (for Non-Top Pak Body) Aluminum Overlay Kit	CST98DL / D-52.5	\$450	\$569
231127-110D-48	West Coast CST (for Non-Top Pak Body) Aluminum Overlay Kit	CST110DL / D-48.5	\$466	\$586
231127-110D-52	West Coast CST (for Non-Top Pak Body) Aluminum Overlay Kit	CST110DL / D-52.5	\$470	\$589
231127-134D-52	West Coast CST (for Non-Top Pak Body) Aluminum Overlay Kit	CST134DL / D-52.5	\$541	\$702

[•]Overlay Kit includes the following features:

[•]Package includes the following features installed (unless noted otherwise):

[•]Supply and install (1 set) of Top Pak lids made of Aluminum Tread-Brite, in lieu of the Standard Steel CST Top Pak Lids.

[•]Aluminum Tread-Brite Tailgate Tip protector (1 each) - Loose

[•]Aluminum Tread-Brite Front Stone Shields (1 pair) - Loose

[•]Size: 10" high x 9.63" wide on SRW, and 10" high x 15.63" wide on DRW.

[•]Supply Rivet Fasteners to secure Tailgate Tip protector & Front Stone Sheilds - Loose

[•]Above Installation Option is required if Complete Installation is required (Factory installed Unit).

[•]Aluminum Tread-Brite Compartment Top Overlay (1 pair)

[•]Size: 13.63" wide x 81.75" long for a CST82S

[•]Size: 13.69" wide x 97.75" long for a CST98S

[•]Size: 13.63" wide x 110.19" long for a CST110S

[•]Size: 19.69" wide x 97.75" long for a CST98D

[•]Size: 19.69" wide x 110.19" long for a CST110D

[•]Size: 19.69" wide x 134.19" long for a CST134D

Aluminum Tread-Brite Tailgate Tip protector (1 each)
 Aluminum Tread-Brite Front Stone Shields (1 pair)

[•]Size: 10" high x 9.63" wide on SRW, and 10" high x 15.63" wide on DRW.

[•]Supply Rivet Fasteners to secure Compartment Top Overlays, Tailgate Tip protector & Front Stone Sheilds